

SKMM FTS P ACLIP
Rev. 1.01:2007

**TECHNICAL SPECIFICATION FOR ANALOGUE
CALLING LINE IDENTITY PRESENTATION (A-CLIP)
FACILITY FOR CONNECTION TO PUBLIC SWITCHED
TELEPHONE NETWORK (PSTN)**



Suruhanjaya Komunikasi dan Multimedia Malaysia
Off Pesiaran Multimedia, 63000 Cyberjaya, Selangor Darul Ehsan, Malaysia

© Copyright of SKMM, 2007

FOREWORD

This Technical Specification was developed under the authority of the Malaysian Communications and Multimedia Commission (SKMM) under the Communications and Multimedia Act 1998 (CMA 98) and the relevant provisions on technical regulation of Part VII of the CMA 98. It is based on recognised International Standards documents

This Technical Specification specifies the standards to conform for testing and certification on telecommunications equipments.

NOTICE

This Specification is subject to review and revision

CONTENTS

| | Page |
|---|-------------|
| Foreword..... | i |
| 1 Scope..... | 1 |
| 2 Normative references | 1 |
| 3 Abbreviations | 1 |
| 4 Requirements | 2 |
| Figures | |
| 1 Single Data Message Frame Format | 5 |
| 2 Multiple Data Message Frame Format | 5 |
| 3 Successful attempt | 8 |
| 4 Unsuccessful attempt | 8 |
| B1 Data transmission associated with PSTN ringing signal (to confirm with STD) | 12 |
| Tables | |
| 1 FSK Data Signal Parameters | 4 |
| 2 Message Type for Calling Number Delivery Service..... | 6 |
| 3 Message Type for additional services | 6 |
| 4 Parameter type words for Call Setup message type..... | 7 |
| 5 Handshaking Signal Characteristics..... | 8 |
| C1 Message format for A-CLIP service | 13 |
| D1 Off-Hook Parameter Values | 14 |

CONTENTS *(continued)*

| | Page |
|---|-------------|
| Annexes | |
| A Normative References | 10 |
| B Data transmission associated with PSTN ringing signal | 12 |
| C Message format for A-CLIP service | 13 |
| D Off-Hook parameter values | 14 |

**TECHNICAL SPECIFICATION FOR ANALOGUE CALLING LINE IDENTITY
PRESENTATION (A-CLIP) FACILITY FOR CONNECTION TO PUBLIC
SWITCHED TELEPHONE NETWORK (PSTN)**

1. Scope

This technical specification describes the requirements for terminal equipment (TE) intended to operate with Analogue Calling Line Identity Presentation (A-CLIP) service provided by voice band on-hook and off-hook data transmission.

The timings and signal levels given are from the TE's perspective and are referred to the connection point between the network and the TE.

Caller Display on Call Waiting is a service where caller number will be delivered by off-hook data transmission using multiple data message format and involves handshaking between the TE and the network.

2. Normative references

The following normative references are indispensable for the application of this Technical Specification. For dated references, only the edition cited applies. For undated references, the latest edition of the normative references (including any amendments) applies.

See Annex A.

3. Abbreviations

For the purpose of this Technical Specification, the following abbreviation applies.

| | |
|------|---|
| AC | Alternating Current |
| CLI | Calling line |
| CSS | Channel Seizure Signal |
| DATA | Data Transmission |
| DC | Direct Current |
| ETSI | European Telecommunications Standards Institute |
| IEC | International Electrotechnical Commission |

| | |
|------|--|
| SI | Silent Interval |
| SKMM | Malaysian Communications and Multimedia Commission |
| T | Transition time |

4. Requirements

4.1 General requirements

4.1.1 Power supply requirements

TE may be AC or DC powered. For AC powered TE, the operating voltage shall be 240 V +5 %, -10 % and frequency 50 Hz \pm 1 % as according to MS 406 or 230 V \pm 10 % and frequency 50 Hz \pm 1 % as according to MS IEC 60038 whichever is current.

Where external power supply is used, e.g. AC adaptor or battery, it shall not affect the capability of the TE to meet this specification.

Adaptor shall be pre-approved by the relevant regulatory body before it can be used with the TE.

4.1.2 Power supply cord and mains plug requirements

TE shall be fitted with a suitable and appropriate approved power supply cord and mains plug. Both are regulated products and shall be pre-approved by the relevant regulatory body before it can be used with the TE.

The power supply cord shall be certified according to:

- MS 140; or
- BS 6500; or
- IEC 60227-5; or
- IEC 60245-4.

The main plug shall be certified according to:

- 13 A fused plugs: MS 589: Part 1 or BS 1363: Part 1; or
- 2.5 A, 250 V, flat non-rewirable two-pole plugs: MS 1578 or BS EN 50075.

4.1.3 Polarity

The performance of the TE shall be independent of the PSTN line polarity i.e. the TE shall conform to both polarities of the line feeding (ETSI TBR 21, clause 4.3.1).

4.1.4 Interoperability and connectivity requirements

TE shall comply with the minimum requirement that is specified by the regulatory body.

4.1.4.1 Interoperability

TE shall be able to exchange information and to use the information that has been exchanged between two or more systems or components.

4.1.4.2 Connectivity

TE shall be able to link with other programs and devices to allow interoperability.

4.1.5 Marking requirements

TE shall be marked with the following information:

- a) supplier/manufacturer's name or identification mark;
- b) supplier/manufacturer's model or type reference; and
- c) other markings as required by the relevant standards.

The markings shall be legible, indelible and readily visible.

4.1.6 Language

All markings, software and related documents shall be in Bahasa Melayu or English language.

4.1.7 Electromagnetic Compatibility and electrical safety requirements

4.1.7.1 TE shall comply with the limits for conducted disturbance at the mains terminals and telecommunication ports, and the limits for radiated disturbance defined in the IEC CISPR 22.

4.1.7.2 TE shall comply with the MS IEC 60950-1 safety standard. The requirements in MS IEC 60950-1 that are applicable to the TE [e.g. class of equipment, type of telecommunication network voltage (TNV) circuit and types of components] shall be identified and complied with.

4.2 Technical Requirement

4.2.1 Received Data Signal Parameters

TE shall be able to interact properly with the network for voiceband data transmission by complying the following received data signal parameters:

Figure 1. Single Data Message Frame Format


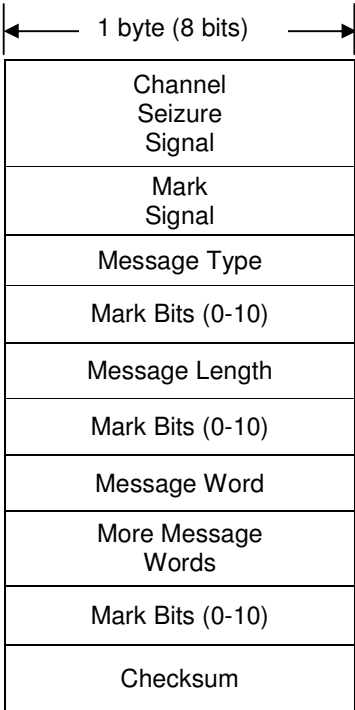


Figure 2. Multiple Data Message Frame Format

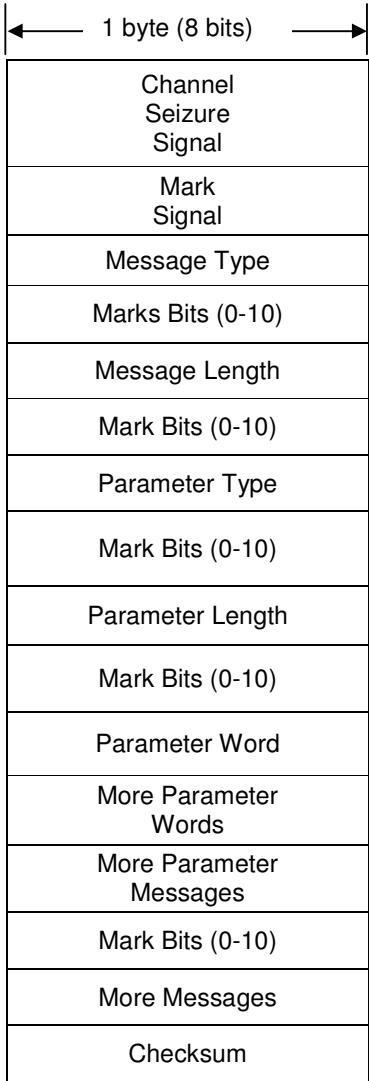

4.2.2.3 The data received shall be in the order of the least significant bit of each data byte first.

4.2.2.4 Message words not recognised by the TE shall be ignored (i.e. the corresponding message shall not be displayed). Recognition shall be based on the value used in the message type.

4.2.2.5 If TE recognises the message type of multiple messages but does not recognise one or more of the parameter type words within the multiple message, the TE shall process the message as follows:

- a) all recognised parameter types shall continue to be processed (i.e. the corresponding message is displayed); and
- b) all unrecognised parameter type words shall be ignored (i.e. the corresponding message is not displayed).

4.2.2.6 On receiving each message (single or multiple) the TE shall be able to switch “ON”, provide the message to be displayed, and then switch “OFF”. Single messages and/or multiple messages shall be received in a sequence, and therefore the TE shall be caused to switch “ON” and “OFF” several times.

4.2.3 Contents of Message

4.2.3.1 Message type indicates service and/or capability associated with the message. Values for the message type of the single and multiple messages shall be in range between the binary equivalence of 0 to 255. The single messages only supported the Calling Number Delivery Service. The content of the single message type word in binary shall be specified in Table 2.

Table 2. Message Type for Calling Number Delivery Service

| Bit number | Value | Meaning | Type of message |
|------------|----------|-------------------------------------|-----------------|
| 76543210 | 00000100 | Calling Number Delivery Information | Single Message |

4.2.3.2 The multiple message type given in Table 3 is expected to be used in new services and in enhancements to existing service.

Table 3. Message type for additional services

| Bit number | Value | Meaning | Type of message |
|------------|----------|------------|------------------|
| 76543210 | 10000000 | Call Setup | Multiple Message |

4.2.3.3 Values for the parameter type words within the multiple messages range between the binary equivalence of 0 to 255. The contents of the parameter type words used in the call setup multiple message by the PSTN shall be as in Table 4.

Table 4. Parameter type words for Call Setup message type

| Bit Number | Value | Meaning |
|------------|----------|-----------------------------|
| 76543210 | 00000001 | Date and Time |
| | 00000010 | Calling Line Identification |
| | 00000100 | Reason for Absence of DN |
| | 00000111 | Name |

4.2.3.4 For the on-hook state, the data transmission may or may not associated with ringing signal. For example, the visual message waiting indication, using on-hook data transmission associated without ringing signal. Data transmission associated with PSTN ringing signal shall be as in Annex B.

4.2.3.5 For on-hook data reception, each Single or Multiple Message shall preceded by a Channel Seizure Signal and a Mark (logic 1) Signal. The purpose of the Channel Seizure Signal and the Mark Signal is to alert and condition the TE for the reception of a message frame. The Channel Seizure Signal shall consists of a block of 300 continuous bits of alternating "0"s and "1"s. The first bit to be received is "0" and the last bit is "1". The Mark Signal shall consists of 180 mark bits.

4.2.3.6 Message formats used by PSTN to convey A-CLIP Service information to TE shall be as in Annex C.

4.2.3.7 TE shall be capable of storing at least 16 characters. The information shall be displayed on a narrower display if scrolling is provided such that all 16 characters can be displayed. TE shall be able to display either lower or upper case letters.

4.2.3.8 When Calling Line (MDMF) Identification (CLI) is Not Available, TE shall be able to interpret reason for Absence of Caller Name. The reason may be displayed as received in the first byte of the parameter (the single ASCII characters "P" or "O"). Messages translated to "Private" or "Unavailable" and "Withheld" or "Out Of Area" are also acceptable.

4.2.3.9 The parameter byte for Network Message System Status indicates when messages are waiting in a message system. A value of zero means no messages waiting, a value of 1 means one or more messages waiting.

4.2.3.10 TE that supports Call Waiting function shall comply as follows:

For off-hook data transmission, a stable call shall be interrupted, and a clear, voice-free channel established in OSI time interval. The PSTN initiates the process within W duration by muting transmission to and from the far end, and transmitting the alerting sequence Subscriber Alerting Signal (SAS) to alert the TE to new waiting calls. After a short period of X1, the PSTN transmit the TE Alerting Signal (CAS) to alert the TE to prepare for data reception.

Upon detection of the CAS, TE shall mutes the subscriber's handset to prevent near-end interference, attaches a data receiver to the line, and responds to the PSTN with an Acknowledge Signal (ACK) indicating it readiness.

The PSTN shall wait for the ACK within t1 period. If ACK is detected, the PSTN shall begin to transmit data after Q transition time and re-establish the voice path by un-muting the far-end shortly after the end of data transmission. At about the same time, the TE shall un-mutes the handset, and the stable call is completely re-established.

In the event that the PSTN do not detects ACK signal within t1 period, the data shall not be transmitted and is called unsuccessful attempt. The complete stages of the process of the successful and unsuccessful attempt shall comply with Figure 3 and Figure 4. The detailed timing requirements describing this handshake shall be as described in Annex D.

The TE CAS and ACK shall meet the characteristics specified in Table 5.

Table 5. Handshaking Signal Characteristics

| Signal | CAS | ACK |
|-----------|--|---|
| Frequency | (2130 ± 11) Hz (2750 ± 14) Hz | 941 Hz ± 1.5 % 1633Hz ± 1 % |
| Level | Between -32 dBm and -14 dBm pertone | Between -12.0 dBm and -8.0 dBm (lower tone) Between -10.0 dBm and -6.0 dBm (upper tone) Level between lower tone and upper tone shall be 1 dB to 6dB higher than the lower tone |

Figure 3. Successful attempt





Figure 4. Unsuccessful attempt



4.2.4 Error Detection

The last word of the Single or Multiple Message is a checksum word. The checksum word shall contain two's complement of the modulo 256 sum of each bit in all the other words in the message. At the TE, checksum shall be recomputed and compared with the checksum word received in the message. The received message is considered to be error free if both values are identical. This approach is not able to detect all transmission errors. Specifically, it cannot detect offsetting bit errors occurring in the same message.

If TE detects an error, none of the received message shall be displayed. TE shall not send a message to indicate that an error has been detected as the PSTN would not retransmit the data. Error correction is not supported by this protocol.

Annex A
(normative)

Normative references


| | |
|-----------------------------------|---|
| BS 1363: Part 1 | 13 A plugs, socket-outlets, adaptors and connection units - Part 1: Specification for rewirable and non-rewirable 13 A fused plugs |
| BS 6500 | Electric cables Flexible cords rated up to 300/500 V, for use with appliances and equipment intended for domestic, office and similar environments |
| BS EN 50075 | Specification for flat non-wirable two-pole plugs 2.5 A 250 V, with cord, for the connection of class II-equipment for household and similar purposes |
| GR-30-CORE Issue 1, December 1994 | Voiceband Data Transmission Interface |
| ETSI 300 001 | Attachments to Public Switched Telephone Network (PSTN); General technical requirements for equipment connected to an analogue subscriber interface in the PSTN |
| ETSI TBR 21 | Terminal Equipment (TE); Attachment Requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) to TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signalling |
| IEC 60227-5 | Polyvinyl chloride insulated cables of rated voltages up to and including 450/750 V - Part 5: Flexible cables (cords) |
| IEC 60245-4 | Rubber insulated cables - Rated voltages up to and including 450/750 V - Part 4: Cords and flexible cables |
| IEC CISPR 22 | Information Technology Equipment - Radio disturbance characteristics - Limits and methods of measurement |
| ITU-T Recommendation E.161 | Arrangement of digits, letters and symbols on telephones and other devices that can be used for gaining access to a telephone network |

SKMM FTS P ACLIP
Rev. 1.01:2007

| | |
|------------------|---|
| ITU-T Rec. T.50 | Terminal equipment and protocols for telematic services |
| MS 140 | Specification for insulated flexible cords and cables |
| MS 1578 | Specification for flat non-rewirable two-pole plugs, 2.5 A, 250 V, with cord, for the connection of class II-Equipment for household and similar purposes |
| MS 406 | Specification for voltages and frequency for alternating current transmission and distribution systems |
| MS 589: Part 1 | Specification for 13 A plugs, socket outlets, adaptors and connection units Part 1: Specification for rewirable and non-rewirable 13 A fused plugs |
| MS IEC 60038 | IEC standard voltages |
| MS IEC 60950-1 | Information technology equipment - Safety - Part 1: General requirements |
| SKMM FTS PSTN | Technical specification for terminal equipment connecting to the Public Switched Telephone Network (PSTN) |
| SKMM FTS P ACLIP | Technical specification for Analogue calling line Identity presentation (A-CLIP) facility for connection to Public Switched Telephone Network (PSTN) |

Annex B
 (normative)

Data transmission associated with PSTN ringing signal

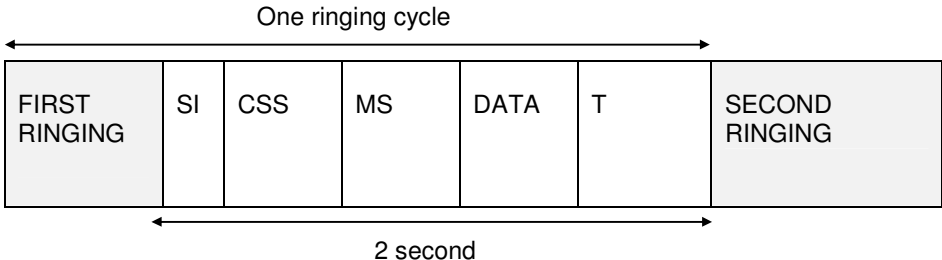

| Parameter | Value | Descriptions |
|-----------------|--|---|
| Ringing Current | 0.4 s ON, 0.2 s OFF, 0.4 s ON, 2.0 s OFF | One ringing cycle |
| SI | (0.25 -0.5) s | Silent interval before transmission of data message from PSTN to TE |
| CSS | 0.2 s | Channel Seizure Signal |
| MS | 0.15 s | Mark Signal |
| DATA | ≥ 200 ms | Data Transmission shall stop at least 200 ms before the arrival of the second ringing cycle. |
| T | ≥ 200 ms | Transition time between data transmission and the second ringing where T shall not be less than 200 ms. |

Figure B1. Data transmission associated with PSTN ringing signal

**Annex C
(normative)**

Message format for A-CLIP service

Table C1. Message format for A-CLIP service

| Calling Line (SDMF) Identification (CLI) | Calling Line (MDMF) Identification (CLI) and Name | Calling Line (MDMF) Identification (CLI) Not Available |
|--|---|--|
| Date | Date | Date |
| Time | Time | Time |
| CLI | CLI | Reason for absence of Directory Number (DN): "P" or "O" |
| | Name (caller's name if provided) | Name: For "P" "PRIVATE"/ "PAYPHONE" fixed characters may be sent For "O" "OVERSEAS"/ "OPERATOR"/ "REMINDER"/ "OUT" may be sent |

Annex D
(normative)

Off-hook parameter values

Table D1. Off-Hook Parameter Values

| Parameter and Assignment | Value | Descriptions |
|--------------------------|------------------------|--|
| OSI | (0-300) ms | An open interval (OSI) where do voltage applied between tip and ring on the line is removed, hence, temporarily suspending line supervision and transmission. |
| W | (0-60) ms | The PSTN mutes for end for this period prior to sending an Alerting Sequence in the absence of an OSI. |
| | 100=10ms (90-110) | The PSTN continues to silence the far and for this period following in OSI |
| X | (250 ms-1 sec) | Duration allowed for any SAS including distinctive patterns. The service specific requirements document will contain information on the timing of the various service-specific tones/patterns. |
| X1 | (0-50) ms | The PSTN is allowed this transition time between the generation of different alerting signals. |
| Y | (80-85)ms | Length of the TE Alerting Signal (CAS) |
| t1 | 160 ±5 ms (155-165) | Acknowledgment time-out. Period that the PSTN waits for an ACK. The PSTN shall time out after 165ms if it does not detect an ACK. Upon detection of an ACK, timing for interval t1 should be stopped, and timing for interval Q should start. |

| | | |
|---|---|---|
| Q | (50-500) ms Strong Objective: 50-100 | Transition between detection of an ACK and the start of P5K data transmission. |
| Z | Feature-specific | Time taken to transmit data feature-dependent. . |
| S | (0-320) ms Strong Objective: 0-120 | Time taken by the PSTN to revert back to voice transmission after the end of data transmission or after the end of an OSI if an OSI occurs. |