

# TECHNICAL CODE

## SPECIFICATION FOR INTEGRATED SERVICES DIGITAL NETWORK (ISDN) USING BASIC ACCESS

First Revision

Developed by



Registered by



Registered date: 18 December 2014

## **MCMC MTSFB TC T008:2014**

### **DEVELOPMENT OF TECHNICAL CODES**

The Communications and Multimedia Act 1998 ('the Act') provides for Technical Standards Forum designated under section 184 of the Act or the Malaysian Communications and Multimedia Commission ('the Commission') to prepare a technical code. The technical code prepared pursuant to section 185 of the Act shall consist of, at least, the requirement for network interoperability and the promotion of safety of network facilities.

Section 96 of the Act also provides for the Commission to determine a technical code in accordance with section 55 of the Act if the technical code is not developed under an applicable provision of the Act and it is unlikely to be developed by the Technical Standards Forum within a reasonable time.

In exercise of the power conferred by section 184 of the Act, the Commission has designated the Malaysian Technical Standards Forum Bhd ('MTSFB') as a Technical Standards Forum which is obligated, among others, to prepare the technical code under section 185 of the Act.

A technical code prepared in accordance with section 185 shall not be effective until it is registered by the Commission pursuant to section 95 of the Act.

For further information on the technical code, please contact:

#### **Malaysian Communications and Multimedia Commission (MCMC)**

Off Persiaran Multimedia  
63000 Cyberjaya  
Selangor Darul Ehsan  
MALAYSIA

Tel: +60 3 8688 8000

Fax: +60 3 8688 1000

<http://www.skmm.gov.my>

OR

#### **Malaysian Technical Standards Forum Bhd (MTSFB)**

4805-2-2, Block 4805, Persiaran Flora  
CBD Perdana 2  
Cyber 12  
63000, Cyberjaya  
Selangor Darul Ehsan  
MALAYSIA

Tel: +60 3 8322 1441/1551

Fax: +60 3 8322 0115

<http://www.mtsfb.org.my>

**CONTENTS**

Committee Representation .....iiv  
FOREWORD ..... v

Section A

Introduction ..... 1

1. Scope..... 1

2. Normative References ..... 1

3. Abbreviations ..... 2

4. General requirements ..... 3

4.1 Design of Equipment ..... 3

4.3 Interoperability ..... 5

5. Electromagnetic Compatibility & Electrical Safety Requirements ..... 5

Section B

Basic User-Network Interface – Layer 1 Specification (ITU-T Recommendation I.430 11/1995) ..... 6

Section C

ISDN User-Network Interface – Data Link Layer (ITU-T Recommendation Q.921 09/1997 & Amendment 1 06/2000)..... 14

Section D

Network layer requirements based on EN 300 403-1 11/99, Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No. One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification [ITU-T Recommendation Q.931 (1993), modified]. ..... 20

1. Introduction ..... 20

2. Supporting Information ..... 20

3. National Option Selections and Clarifications ..... 21

3.1 Layer One Protocol for Basic Call Control (DSS1) ..... 21

3.2 Layer Two Protocol for Basic Call Control (DSS1) ..... 21

3.3 Layer Three Protocol for Basic Call Control (DSS1) ..... 21

4. Terminal Characteristics Related To Access Signaling ..... 26

5. Terminal Adaptors ..... 26

5.1 Circuit Mode Bearer Services ..... 26

# MCMC MTSFB TC T008:2014

## Section E

Digital Transmission System on Metallic Local Lines for ISDN Basic Rate Access (ITU-T Recommendation G.961 03/1993).....	27
--	----

## Tables

1	General layer 1 requirements .....	6
2	Functional characteristics .....	7
3	Interface procedures.....	8
4	Layer 1 maintenance .....	9
5	Electrical characteristics .....	10
6	Power feeding.....	12
7	Interface connector contact assignments .....	13
8	Frame structure for peer-to-peer communication .....	14
9	Elements of procedure and formats of field for data link layer peer-to-peer communication .....	14
10	Elements for layer-to-layer communication.....	15
11	Procedures for use by the data link layer .....	16
12	Annexes and Appendices .....	18
13	Appendices .....	21
14	Digital transmission system on metallic local lines for ISDN basic rate access .....	27
15	Core requirements for a system using 2B1Q line code (ITU-T Rec. Q.961 Appendix II)...	28
16	Extension functions of the system using 2B1Q line code (Annex A to ITU-T Rec. Q.961 Appendix II).....	31
Figure 1	Reference Configurations for ISDN User-Network Interface (Figure 1/I.430).....	2

## Annexes

A	Normative references .....	32
B	Technical Guidelines of ISDN Supplementary Service .....	33
C	Addendum/Corrigendum .....	1

## **MCMC MTSFB TC T008:2014**

### **Committee Representation**

The Fixed Terminal Working Group under the Malaysian Technical Standards Forum Bhd (MTSFB) which developed this Technical Code consists of representatives from the following organisations:

NEC Corporation of Malaysia Sdn.Bhd.

SIRIM QAS International Sdn Bhd

Telekom Malaysia Berhad

TIME dotcom Berhad

AJV Holding Sdn Bhd

Epson Malaysia

Packet One Networks Sdn Bhd

Panasonic Malaysia

Panasonic System Networks

**FOREWORD**

This Technical Code for the Specification for Integrated Services Digital Network (ISDN) Using Basic Access (BA) (First Revision) ('this Technical Code') was developed pursuant to section 185 of the Act 588 by the Malaysian Technical Standards Forum Bhd (MTSFB) via its Fixed Terminal Working Group.

This Technical Code was developed for the purpose of certifying communications equipment under the Communications and Multimedia (Technical Standards) Regulations 2000.

This Technical Code cancels and replaces Technical Specification for Connecting to the Integrated Services Digital Network (ISDN) using Basic Access, SKMM FTS ISDN-BA Rev. 1.01:2007.

This Technical Code shall continue to be valid and effective until reviewed or cancelled.

**THIS PAGE IS INTENTIONALLY LEFT BLANK**

# **SPECIFICATION FOR INTERGRATED SERVICES DIGITAL NETWORK (ISDN) USING BASIC ACCESS (BA)**

## **Section A**

### **Introduction**

#### **1. Scope**

1.1. This Technical Code identifies the minimum technical requirements for connecting to the Integrated Services Digital Network (ISDN) at the S/T interface using Basic Access (BA). It also identifies the requirements for the digital transmission system at the network side of the Network Termination (NT1) forming part of the ISDN BA.

1.2. ISDN BA equipment connected to the S/T interface (see Figure 1) shall have either Terminal Equipment Type 1 (TE1) or Terminal Adaptor (TA) function incorporated. For such equipment, suppliers shall demonstrate that it has been tested to comply with the requirements defined in Section A, B, C and D of this Specification.

Section B – Physical layer requirements based on ITU-T Rec. I.430, Basic Rate User-Network - Interface Layer 1 Specification

Section C – Link Access Procedure on the D-channel, LAPD based on ITU-T Rec. Q.921, ISDN User-Network Interface - Data Link Layer Specification

Section D – Network layer requirements based on EN 300 403-1 11/99, Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No. One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification [ITU-T Recommendation Q.931 (1993), modified].

1.3 If the ISDN BA equipment has the NT1 function built-in, suppliers shall demonstrate that it has been tested to comply with the requirements defined in Section A, B, C, D as well as Section E.

1.4. If the NT1 function is standalone, suppliers shall demonstrate that the NT1 equipment has been tested to comply with the requirements defined in Section A and E. Section E defines the digital transmission system at the network side of the NT1, and is based on the ITU-T Rec. G.961. The digital transmission system shall use line codes and transmission methods given in Appendix II of the ITU-T Rec. G.961. References to ETSI ETR 080 are given for information only. The TE side of the NT1 shall conform to the network requirements of the ITU-T Rec. I.430.

#### **2. Normative references**

The normative references as in Annex A are indispensable for the application of this Technical Specification. For dated references, only the edition cited applies. For undated references, the latest edition of the normative references (including any amendments) applies.



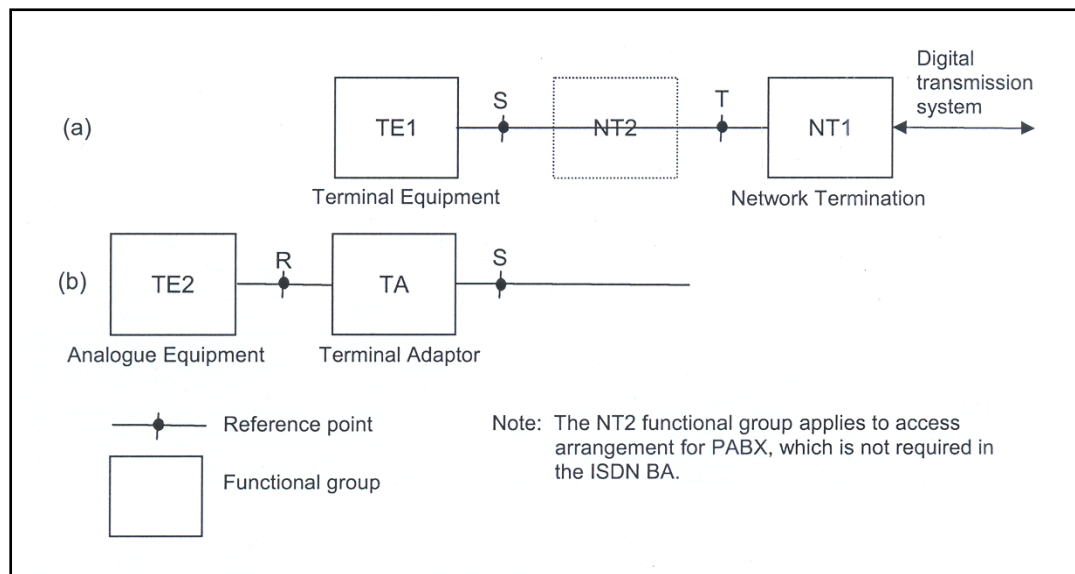


Figure 1. Reference Configurations for ISDN User-Network Interface (Figure 1/I.430)

### 3. Abbreviations

The use of the term TE within the Specification refers to a TE1, a TA or a Network Termination 2 (NT2).

The following notations are used in this Specification :

- CR Conformance Requirement defines features and functions that must be supported at minimum.
- M Mandatory requirement is where the TE implementation shall conform to those clauses in that section relating to the operation of Layer 1, Layer 2 and Layer 3 protocol in the TE.
- O Optional requirement means it is optional whether TE implements that function but if function is implemented, it shall conform to the clauses in that section relating to the operation of the TE Layer 1, Layer 2 and Layer 3 protocol.

However, the use of optional functions is possible only if the network operators have implemented these options in their networks.

- NA Not Applicable is where the requirements specified in that section on the TE shall not be applicable for attachment.
- GID The section provides General Information and Definitions.
- TE1 ISDN-capable terminal equipment e.g.: Digital phone and digital fax
- TE2 Non-ISDN equipment e.g: Analogue phone and the RS-232 serial port on computer
- TA Terminal adapter that interface the TE2 devices with ISDN network
- NT1 Network terminator that reside between telco's network and customer equipment
- NT2 An intelligent device that can perform switching function e.g: PABX and Local Area Network (LAN)

# MCMC MTSFB TC T008:2014

## 4. General requirements

### 4.1 Design of Equipment

CR

Power supply	<p>a) For AC powered TE, the operating voltage shall be rated/ marked at 230V or 240V in line with the country's nominal voltage and frequency in accordance to MS IEC 60038. If the product is rated with multiple or a range of voltages, voltage range between 230V (+10%,-6%) shall be included. Testing shall be conducted based on 230V (+10%,-6%) or 240V and other relevant voltages, if the product is marked with multiple or a range of voltages</p> <p>b) Product shall be rated/ marked at 50Hz and testing shall be conducted at 50Hz. If the product is marked at 50/60Hz or 50-60Hz then testing shall be conducted either at 50Hz or 60Hz, whichever is more unfavourable</p> <p>c) Where external power supply is used, e.g AC adaptor, it shall not affect the capacity of the equipment to meet this specification. Adaptor must be pre-approved by the relevant regulatory body before it can be used with the equipment.</p> <p>NOTE: Either one of these options shall be applied.</p>	Note 1
Identification of equipment	<p>Equipment shall be marked with:</p> <p>a) supplier's or manufacturer's name or identification mark</p> <p>b) supplier's or manufacturer's model or type reference</p> <p>The markings shall be legible, indelible and readily visible</p>	<p>M</p> <p>M</p> <p>M</p>
Keypad Dialling	<p>a) Keypads used in equipment for dialling shall be alphanumeric keypads and the relationships between the letters and the digits shall comply with ITU-T Rec E.161 as shown in Figure 2.</p> <p>b) The associated letters shall not impair the legibility of the digit (§ 3.1.1, ITU-T Rec. E.161).</p> <p>c) The `tactile identifier on the "5" button shall be provided (§ 3.6, ITU-T Rec. E.161).</p>	<p>M</p> <p>M</p> <p>M</p>

## MCMC MTSFB TC T008:2014

1	2 ABC	3 DEF
4 GHI	5 JKL	6 MNO
7 PQRS	8 TUV	9 WXYZ
*	0	#

Figure 2. Alphanumeric Keypad Layout (ITU-T Rec. E. 161)

### 4.2 Interface

#### 4.2.1 Network Interface

Connector	2 wire or RJ45
Feed voltage	48 V to 110 V d.c
Line Coding	2B1Q
Impedance	120 $\Omega$ (RJ45)
Switch type	NET 3

#### 4.2.2 Analogue Interface

When provided, the equipment has the TA function for connecting analogue equipment at the R interface as shown Figure 1.

Connector	RJ 11 jack or RJ45 jack	Note 2
Feed voltage	$\leq 40$ V DC	Note 2
Line extension	Interworking with loop resistance up to 500 $\Omega$	Note 2
MFPB receiver	a) Level range: 0 dBm to -26 dBm	Note 2
	b) Signal detection: min 40ms	Note 2
	c) Interdigit pause : min 40ms	Note 2
	d) Frequency deviation: $\pm 1.8\%$	Note 2
Ringing current transmit	a) Frequency: 24Hz	Note 2
	b) Periodicity for normal ringing: 0.4s (on), 0.2s (off), 0.4s (on), 2.0s (off)	Note 2
	c) Periodicity for duplex/distinctive ringing: 1.2s (on), 3.0s (off)	Note 2
	d) Voltage: $\leq 75$ V	Note 2
Dial tone transmit	425 Hz continuous tone	Note 2

## MCMC MTSFB TC T008:2014

Busy tone transmit	a) 425 Hz	Note 2
	b) Periodicity: 0.75 s (on), 0.75 s (off)	Note 2
Output level	Analogue output signal level shall not exceed -6 dBm averaged over any 10s period	Note 2
A/D/A companding	Digital telephones and other customer equipment providing acoustic interfaces to the digital bit stream shall comply with ITU-T G.711 (A-law).	

NOTE: Requirement is 'NA' if TE does not have TA function for connecting analogue equipment to the R interface.

### 4.3 Interoperability

TE1 and TA are dynamically interoperable if they implement a common and compatible set of features, functions and options and can demonstrate satisfactory mutual communication in a real network architecture environment as performance test conditions are varied and exercised. It is mandatory that the TE1 and TA be tested with the respective Service Provider to ensure interoperability. The general reference model for interoperability is shown in Figure 1.

## 5. Electromagnetic Compatibility & Electrical Safety Requirements

**5.1** The equipment shall comply with the limits for conducted disturbance at the mains terminals and telecommunication ports, and the limits for radiated disturbance defined in the IEC CISPR 22.

**5.2** The equipment shall comply with the IEC 60950-1 safety standard<sup>1</sup>. The requirements in IEC 60950-1 that are applicable to the equipment [e.g. class of equipment, type of telecommunication network voltage (TNV) circuit and types of components shall be identified and complied with.

---

<sup>1</sup> The safety standard includes, among others, protection of telecommunications network service personnel and users of other equipment connected to the network from hazards in the equipment.

**Section B**

**Basic User-Network Interface – Layer 1 Specification  
(ITU-T Recommendation I.430 11/1995)**

**Table 1. General layer 1 requirements**

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
General	1	–	GID	
Service characteristics	2	–	–	Heading
Services required from the physical medium	2.1	–	M	A balance metallic transmission medium for each direction of transmission capable of supporting 192 kbit/s
Service provided to layer 2	2.2	–	–	
Primitives between layer 1 and the other entities	2.3	–	M	
Modes of operation	3	–	GID	
Point-to-point operation	3.1	–	M	
Point-to-multipoint operation	3.2	–	M	
Types of wiring configuration	4	–	GID	
Point-to-point configuration	4.1	–	Note	
Point-to-multipoint configuration	4.2	–	Note	
Wiring polarity integrity	4.3	–	M	
Location of the interfaces	4.4	–	GID	
NT and TE associated wiring	4.5	–	M	
NOTE: Either one of these wiring configuration shall be applied.				

Table 2. Functional characteristics

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Functional characteristics	5	–	GID	Heading
Interface functions	5.1	–	–	Heading
B-channel	5.1.1	–	M	For each direction of transmission, provides two independent 64 kbit/s channels for use as B-channels
Bit timing	5.1.2	–	M	Provides bit timing at 192 kbit/s
Octet timing	5.1.3	–	O	Provides 8 kHz octet timing
Frame alignment	5.1.4	–	M	Provides information to enable NT and TE to recover the TDM channels
D-channel	5.1.5	–	M	For each direction of transmission, provides one D- channel at a bit rate of 16 kbit/s
D-channel access procedure	5.1.6	–	M	For procedures relating to D- channel access see Clause 6.1.
Power feeding	5.1.7	–	GID	Refer to Clause 9
Deactivation	5.1.8	–	M	Refer to Clause 6.2
Activation	5.1.9	–	M	Refer to Clause 6.2
Interchange circuits	5.2	–	M	Two interchange circuits, one for each direction of transmission shall be used to transfer digital signals across the interface.
Connected/disconnected indication	5.3	–	M	The criterion used is the appearance/disappearance of power.
TEs powered across the interface	5.3.1	–	M	
TEs not powered across the interface	5.3.2	–	M	
Indication of connection status	5.3.3	–	M	
Frame structure	5.4	–	M	In both direction of transmission, the bits shall be grouped into frames of 48 bits each.
Line code	5.5	9.3.2	M	Figure 4/I.430
Timing considerations	5.6	–	M	A TE shall derive its timing from the signal received from NT and use this derived timing to synchronise its transmitted signal.

Table 3. Interface procedures

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Interface procedures	6	–	–	Heading
D-channel access procedure	6.1	9.4.1	M	
Interframe (layer 2) time fill	6.1.1	9.4.1.1	M	Interframe time fill in the NT to TE direction is HDLC flags.
D-echo channel	6.1.2	–	NA	Network requirement
D-channel monitoring	6.1.3	–	M	
Priority mechanism	6.1.4	9.4.1.2	M	The use of priority class 2 is not a requirement under TBR 3.
Collision detection	6.1.5	9.4.1.3	M	
Priority system	6.1.6	–	M	An example of how the priority system may be implemented.
Activation/deactivation	6.2	9.4.2	–	Heading
Definitions	6.2.1	–	–	Heading
TE states	6.2.1.1	9.4.2.1	M	PS2 is not a requirement under TBR 3. Loss of local power or absence of power from PS1 may be used for determining the connection status.
NT states	6.2.1.2	–	NA	
Activate primitives	6.2.1.3	–	M	
Deactivate primitives	6.2.1.4	–	M	
Management primitives	6.2.1.5	–	O	
Valid primitive sequences	6.2.1.6	–	NA	
Signals	6.2.2	9.4.2.2	M	
Activation/deactivation procedure for TEs	6.2.3	9.4.2.3	M	
Activation/deactivation for NTs	6.2.4	–	NA	
Timer values	6.2.5	9.4.2.3.2	O	Timer 3 < 30 s
Activation times	6.2.6	–	–	Heading
TE activation times	6.2.6.1	9.4.2.4	M	
NT activation times	6.2.6.2	–	NA	
Deactivation times	6.2.7	9.4.2.5	M	
Frame alignment procedures	6.3	9.4.3	M	

**Table 3. Interface procedures (continued)**

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Frame alignment procedure in the direction NT to TE	6.3.1	9.4.3 Note 1	M	Loss of frame alignment is assumed when a time period equivalent to 2 (“n” in the case of TBR 3) 48-bit frames has elapsed without having detected valid pairs of line code violations obeying the ≤ 14-bit criterion as described in § 5.4.2.2.  Frame alignment may be assumed to occur when 3 (“m” in the case of TBR 3) consecutive pairs of line code violations obeying the ≤ 14-bit criterion have been detected.
Frame alignment in the direction TE to NT	6.3.2	–	NA	
Multiframeing	6.3.3	9.4.4 Note 2	O	The use of Q-channel and S- channel is optional.
S-channel structuring algorithm	6.3.4	–	O	The use of S-channel is optional.
Idle channel code on the B-channels	6.4	9.4.5	M	
<p>NOTES:</p> <p>1. In TBR 3, “n” is a value between 2 to 20, and “m” is a value between 3 and 100. There is no requirement for “m” and “n” to remain constant under all circumstances of loss and recovery of frame alignment. The recommended values for “m” and “n” are 5.</p> <p>2. Under TBR 3, when the TE receives an FA bit which is binary ZERO, it shall send a binary ZERO in the corresponding FA bit position of the frame transmitted to the NT. No requirement applies when the FA bit received is a binary ONE.</p>				

**Table 4. Layer 1 maintenance**

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Layer 1 maintenance	7	–		Heading
Provision for operational and maintenance functions between terminal and NT1	7.1	–	O	



Table 5. Electrical characteristics

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Bit rate	8.1	9.2.1	M	192 kbit/s < $\pm 100$ ppm
Jitter and bit-phase relationship between TE input and output	8.2	9.2.2	–	Heading
Test configurations	8.2.1	9.2.2.1	GID	
Timing extraction jitter	8.2.2	9.2.2.2	M	$\pm 7\%$
Total phase deviation input to output	8.2.3	9.2.2.3Note 1	M	-7% to +15%
NT jitter characteristics	8.3	–	NA	
Termination of the line	8.4	–	NA	
Transmitter output characteristics	8.5	9.2.3	–	Heading
Transmitter output impedance	8.5.1	–	GID	
NT transmitter output impedance	8.5.1.1	–	NA	
TE transmitter output impedance	8.5.1.2	9.2.3	M	
Test load impedance	8.5.2	–	M	50 $\Omega$
Pulse shape and amplitude (binary ZERO)	8.5.3	9.2.4	Heading	Figure 13/I.430 750 mV
Pulse unbalance	8.5.4	9.2.5	M	Within the threshold as given in figure 9.5 (TBR 3) / Figure 13/I.430 $\leq 5\%$
Voltage on other test loads (TE only)	8.5.5	9.2.6.1 9.2.6.2	M	400 $\Omega$ load and 5.6 $\Omega$ load
Unbalance about earth	8.5.6	–	M	10 kHz $\leq f \leq$ 300 kHz : $\geq 54$ dB 300 kHz < $f \leq$ 1 MHz : min. value decreasing from 54 dB at 20 dB/decade
Longitudinal conversion loss (LCL) of the transmitter output	–	9.2.7	–	10 kHz $\leq f \leq$ 300 kHz : $\geq 54$ dB
Receiver input characteristics	8.6	–	–	Heading
Receiver input impedance	8.6.1	–	–	Heading
TE receiver input impedance	8.6.1.1	9.2.8	M	As specified in § 8.5.1.2/I.430
NT receiver input impedance	8.6.1.2	–	NA	
Receiver sensitivity – Noise and distortion immunity	8.6.2	9.2.9	M	
TEs	8.6.2.1	9.2.9	M	
NTs for short passive bus	8.6.2.2	–	NA	
NTs for point-to-point and short passive	8.6.2.3	–	NA	

Table 5. Electrical characteristics (continued)

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
NTs for extended passive bus	8.6.2.4	–	NA	
NTs for point-to-point configuration	8.6.2.5	–	NA	
NT receiver input delay characteristics	8.6.3	–	NA	
Unbalance about earth	8.6.4	–	M	10 kHz $\leq$ $f$ $\leq$ 300 kHz : $\geq$ 54 dB 300 kHz $<$ $f$ $\leq$ 1 MHz : min. value decreasing from 54 dB at 20 dB/decade
–	–	9.2.10	–	Longitudinal Conversion Loss (LCL) of receiver inputs 10 kHz $\leq$ $f$ $\leq$ 300 kHz : $\geq$ 54 dB
Isolation from external voltages	8.7	–	GID	
Interconnecting media characteristics	8.8	–	M	
Standard ISDN basic access TE cord	8.9	9.1.4	M	
Longitudinal output voltage	8.10	–	GID	
Electromagnetic compatibility (EMC)	8.11	–	Note 2	
NOTES: 1. The limitation applies for input bit rates of 192 kbit/s $\pm$ 1 ppm. 2. EMC requirements are specified in § 3 of this Specification.				

Table 6. Power feeding

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Power feeding	9	9.5	–	Heading
Reference configuration	9.1	–	M	The use of leads c, d, e and f is mandatory.
Functions specified at the access leads	9.1.1	9.5.1	M	9.1.1 i) is mandatory.
Provision of power sources and sinks	9.1.2	–	O	PS3 is not used.
Power feeding voltage	9.1.3	–	M	Basic voltage range is 34 V to 42 V from the power source.
Power available from NT	9.2	–	O	Heading
Power source 1 normal and restricted mode	9.2.1	–	O	
Voltage NT from power source 1	9.2.2	–	O	
Voltage of power source 2	9.2.3	–	O	
Short circuit protection	9.2.4	–	M	
Power available at TE	9.3	–	O	Heading
Power consumption unit	9.3.1	–	O	
Power source 1 - Phantom powering	9.3.2	–	O	
Power source 2 - Optional third pair	9.3.3	–	O	
PS1 current transient	9.4	9.5.2	M	Applicable to TE drawing from power source 1
TE power consumption	9.5	–	GID	Heading
Power source 1	9.5.1	9.5.3	M	Applicable when power sink 1 is implemented
Power source 2	9.5.2	Note 1	M	Applicable when power sink 2 is implemented
Galvanic isolation	9.6	9.5.4 Note 2	M	Isolation shall be a minimum of 1 M $\Omega$ when measured at 500 V d.c.
Limitations on power source and sink during transient condition	9.7	9.5.5	GID	
Current/time limitations for TEs	9.7.1	–	–	Heading
Terminals powered from power source 1	9.7.1.1	9.5.5.1	O	Applicable when power sink 1 is implemented
Terminals powered from power source 2	9.7.1.2	Note 1	O	Applicable when power sink 2 is implemented
Power source switchover time (PS1 or PS2)	9.7.2	–	O	Applicable when switchover is implemented
Other TE requirements	9.7.3	9.5.5.2	–	Heading
Minimum TE start up current from power source 1	9.7.3.1	9.5.5.2.1	O	Applicable when power sink 1 is implemented

Table 6. Power feeding (continued)

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Minimum TE start up current from power source 2	9.7.3.2	Note 1	O	Applicable when power sink 2 is implemented
Verification	9.7.3.3	–	GID	Test circuit given in Clause I.6
Protection against short term interruptions	9.7.3.4	9.5.5.2.2	M	
Behaviour at switch-over	9.7.3.5	9.5.5.2.3	O	Applicable when switch-over is implemented
Effective capacitance at the PS1 or PS2 input to the TE	9.7.3.6	–	GID	
TE behaviour at low input voltage	9.7.3.7	–	GID	
Other power source requirements	9.7.4	–	O	
PS1 direct current unbalance	9.8	–	GID	
TE requirements	9.8.1	9.5.5.3	O	
NT requirements	9.8.2	–	NA	
Additional requirements for an auxiliary power supply (APS)	9.9	–	NA	
Additional requirements for NT1 restricted mode source for compatibility with an APS	9.10	–	NA	
NOTES: 1.Under TBR 3, PS2 is not supported. 2.Under TBR 3, for galvanic connection to earth, the direct current between PS1 and any earth connection on the TE shall not exceed 100µA.				

Table 7. Interface connector contact assignments

Title	ITU-T Rec. I.430	ETSI TBR 3	CR	Remarks
Interface connector contact assignments	10	9.1 Note	M	Contacts a, b, g and h are not used.
NOTE. The use of contacts a, b, g and h for PS2 and PS3 is outside the scope of TBR 3.				

## Section C

**ISDN User-Network Interface – Data Link Layer  
(ITU-T Recommendation Q.921 09/1997 & Amendment 1 06/2000)**

Table 8. Frame structure for peer-to-peer communication

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
General	1	–	GID	
Frame structure for peer-to-peer communication	2	10.1	GID	Heading
General	2.1	10.1.1	M	
Flag sequence	2.2	10.1.2	M	
Address field	2.3	10.1.3	M	
Control field	2.4	10.1.4	M	
Information field	2.5	10.1.5	M	
Transparency	2.6	10.1.6	M	
FCS field	2.7	10.1.7	M	
Format convention	2.8	10.1.8	–	
Invalid frames	2.9	10.1.9 Note	M	
Frame abort	2.10	–	M	Not a TBR 3 requirement
NOTE. TBR 3 includes a frame which contains a TEI that is not assigned to the TE as invalid.				

Table 9. Elements of procedure and formats of field for data link layer peer-to-peer communication

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Elements of procedure and formats of field for data link layer peer-to-peer communication	3	10.2	–	Heading
General	3.1	10.2.1	GID	
Address field format	3.2	10.2.2	M	
Address field variables	3.3	10.2.3	–	
Control field formats	3.4	10.2.4	M	
Control field parameters and associated state variables	3.5	10.2.5	M	
Poll/Final (P/F) bit	3.5.1	10.2.5.1	M	
Multiple frame operation - variables and sequence numbers	3.5.2	10.2.5.2	–	
Unacknowledged operation - variables and parameters	3.5.3	–	GID	One parameter is defined, N201 (see 5.9.3).

**Table 9. Elements of procedure and formats of field for data link layer peer-to-peer communication (continued)**

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Frame types	3.6	10.2.6	–	Heading
Commands and responses	3.6.1	10.2.6.1 Note	M	Refer to Table 5/Q.921
Information (I) command	3.6.2	10.2.6.2	M	
Set Asynchronous Balanced Mode Extended (SABME) command	3.6.3	10.2.6.3	M	
Disconnect (DISC) command	3.6.4	10.2.6.4	M	
Unnumbered Information (UI) command	3.6.5	10.2.6.5	M	
Receive Ready (RR) command/response	3.6.6	10.2.6.6	M	
Reject (REJ) command/response	3.6.7	10.2.6.7	M	
Receive Not Ready (RNR) command/response	3.6.8	10.2.6.8	M	
Unnumbered Acknowledgement (UA) response	3.6.9	10.2.6.9	M	
Disconnected Mode (DM) response	3.6.10	10.2.6.1 0	M	
Frame Reject (FRMR) response	3.6.11	–	M	Note
Exchange Identification (XID) command/response	3.6.12	–	M	Note
NOTE. TBR 3 does not support FRMR response and XID command/response.				

**Table 10. Elements for layer-to-layer communication**

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Elements for layer-to-layer communication	4	–	GID	

Table 11. Procedures for use by the data link layer

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Definition of peer-to-peer procedures for the data link layer	5	–	GID	
Procedures for the use of P/F bit	5.1	–	–	Heading
Unacknowledged information transfer	5.1.1	10.4.1	M	
Acknowledged multiple frame information transfer	5.1.2	10.6 and 10.7	M	
Procedure for unacknowledged information transfer	5.2	10.4	–	Note 1
Terminal Endpoint Identifier (TEI) management procedures	5.3	10.5	–	
General	5.3.1	10.5.1	M	Note 2
TEI assignment procedure	5.3.2	10.5.2	M	Note 2
TEI check procedure	5.3.3	–	–	Heading
Use of TEI check procedure	5.3.3.1	–	NA	
Operation of the TEI check procedure	5.3.3.2	10.5.3	M	Note 3
TEI removal procedure	5.3.4	10.5.4	M	Note 3
TEI identity verify procedure	5.3.5	10.5.5	O	Note 3
Formats and codes	5.3.6	10.5.6	–	Note 3
Initialisation of data link layer parameters	5.4	–	NA	Note 4
Procedure for establishment and release of multiple frame operation	5.5	10.6	–	Heading
Establishment of multiple frame operation	5.5.1	10.6.1	M	
Information transfer	5.5.2	10.4, 10.7 and 10.8	M	Refer to Clauses 5.2, 5.6 and 5.7
Termination of multiple frame operation	5.5.3	10.6.2	–	
TEI-assigned state	5.5.4	–	M	
Collision of unnumbered commands and responses	5.5.5	10.6.3	–	
Unsolicited DM response and SABME or DISC command	5.5.6	–	M	
Procedure for information transfer in multiple frame operation	5.6	10.7	M	
Re-establishment of multiple frame operation	5.7	10.8	–	

Table 11. Procedures for use by the data link layer (continued)

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Exception condition reporting and recovery	5.8	10.9 Note 5	GID	
List of system parameters	5.9	10.10	GID	
Timer T200	5.9.1	10.10.1	M	The default value shall be 1 s.
Max number of retransmissions (N200)	5.9.2	10.10.2	M	The default value shall be 3.
Max number of octets in an information field (N201)	5.9.3	10.10.3	M	The default value shall be 260 octets.
Max number of transmission of the TEI identity request message (N202)	5.9.4	10.10.4	M	The default value shall be 3.
Max number of outstanding I frames (k)	5.9.5	10.10.5	M	For a SAP supporting basic access signaling, the value is 1.
Timer T201	5.9.6	–	NA	Network requirement
Timer T202	5.9.7	10.10.6	M	The default value shall be 2 s.
Timer T203	5.9.8	–	O	The default value is 10 s.
–	–	10.10.7 Note 6	GID	Layer 2 response time
Data link monitor function	5.10	–	O	
<p>NOTES:</p> <ol style="list-style-type: none"> <li>1. 'NA' if TE is an ISPBX and supports configuration using only a single point-to-point data link.</li> <li>2. 'NA' if TE supports configuration using only a single point-to-point data link. Requirements are applicable if TE is ISPBX.</li> <li>3. 'NA' if TEI assignment procedure is 'NA'.</li> <li>4. The data link layer parameters shall be initialised to default values.</li> <li>5. TBR 3 considers the receipt of an invalid N(R) as the only condition for frame rejection.</li> <li>6. The maximum time between receipt of an incoming frame, and generation of a response shall not exceed (a) 500 ms if operating in a point-to-point signaling connection; and (b) 200 ms for TEs in point- to-multipoint configuration.</li> </ol>				



Table 12. Annexes and Appendices

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Provision for point-to-point data link connection	Annex A	10.3	M	For single point-to-point signaling connection at layer 3, TEI value 0 shall be used in combination with SAPI 0. TEI management procedures are not applicable.
An SDL representation of the point-to-point procedures of data link layer	Annex B	–	–	
SDL representation of the broadcast procedures of the data link layer	Annex C	–	–	
State transition table of the point-to-point procedures of the data link layer	Annex D	–	–	
Provision of multi-selective reject option	Annex E	–	GID	
Protocol Implementation Conformance Statement (PICS) to Recommendation Q.921 for Basic Rate (User-side)	Annex F	–	GID	
Protocol Implementation Conformance Statement (PICS) to Recommendation Q.921 for Basic Rate (Network-side)	Annex G	–	GID	
Protocol Implementation Conformance Statement (PICS) to Recommendation Q.921 for Primary Rate (User-side)	Annex H	–	NA	
Protocol Implementation Conformance Statement (PICS) to Recommendation Q.921 for Primary Rate (Network-side)	Annex I	–	NA	
Inter-exchange signaling data link layer protocol in Private Integrated Services Networks (PISNs)	Annex J (Q.921 Amendment 1)	–	GID	Applicability and additions to frame structure, elements of procedures, formats of fields, elements for layer-to-layer communication, peer-to-peer procedures to accommodate PISN inter-exchange requirements
Retransmission of REJ response frame	Appendix I	–	NA	

**Table 12. Annexes and Appendices** *(continued)*

Title	ITU-T Rec. Q.921	ETSI TBR 3	CR	Remarks
Occurrence of MDL-ERROR-INDICATION within the basic states & actions to be taken by the management entity	Appendix II	–	M	
Optional basic access deactivation procedures	Appendix III	–	NA	May be used by network side system management to control deactivation of access
Automatic negotiation of data link layer parameters	Appendix IV	–	NA	
Inter-exchange signaling data link layer protocol in PISNs	Appendix V (Q.921 Amendment 1)	–	GID	Occurrence of the MDL-ERROR indication primitive in the data link layer protocol for the support of Inter-exchange signaling in PISNs

## **Section D**

### **Network layer requirements based on EN 300 403-1 11/99, Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No. One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification [ITU-T Recommendation Q.931 (1993), modified]**

#### **1. Introduction**

This section contains clarification and recommended option selections for the ETSI ISDN standards and technical reports related to basic call control procedures of ISDN basic and primary access signaling. This document covers the basic call control of layers 1, 2 and 3. The aim of this document is to avoid unnecessary options and vagueness in ISDN implementations and to ensure the interoperability of ISDN networks and terminal equipment in Malaysia. This requirement has to be followed when implementing access-signaling protocol i.e. Digital Subscriber Signaling System No. 1 (DSS1).

#### **2. Supporting Information**

- 2.1 Integrated Services Digital Network (ISDN): Standards Guide (ETR 076 – December 1996, Fourth Edition)
- 2.2 Integrated Services Digital Network (ISDN): Customer Access Maintenance (ETR 001 August 1990)
- 2.3 Integrated Services Digital Network: User –Network interface layer 3 Specifications for basic call control (ETS 300 102-1 12/90)
- 2.4 Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No.(DSS1) protocol: Data link layer; Part 2: General protocol specification [ITU-T Recommendation Q.921 (1993), modified] (ETS 300 402-2 11/95).
- 2.5 Integrated Services Digital Network (ISDN):Digital Subscriber Signaling System No.One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification [ITU-T Recommendation Q.931 (1993), modified] ) (ETS 300 403-1 11/95)
- 2.6 Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No.One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification [ITU-T Recommendation Q.931 (1993), modified] (EN 300 403-1 11/99).
- 2.7 Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No.One (DSS1) Protocol: Signaling Network Layer For Circuit-Mode Basic Call Control: Part 2: Specification and Description Language (SDL) Diagrams (ETS 300 403-2 11/95).
- 2.8 Integrated Services Digital Network (ISDN) : Application Of The Bearer Capability (BC), High Layer Compatibility (HLC) and Low Layer Compatibility (LLC) Information Elements By Terminals Supporting ISDN Services (ETR 018 11/95)
- 2.9 ISDN User –Network Interface Layer 3 Specification for basic call control (ITU-T Q.931 3/93)
- 2.10 Technical Guidelines of ISDN Supplementary Services (Functional Protocol)

### **3. National Option Selections and Clarifications**

#### **3.1 Layer One Protocol for Basic Call Control (DSS1)**

The DSS1 basic call layer one protocol for the basic access is contained in the standard ETS 300 012 (10/98) and for the primary rate access in the standard ETS 300 011 (3/98)

The ETSI technical report ETR 001(8/90) defines the maintenance requirement for basic and primary access.

#### **3.2 Layer Two Protocol for Basic Call Control (DSS1)**

The DSS1 basic call layer two protocol for the basic and primary access is contained in the standard ETS 300 402-1 (11/95).

It is recommended that a reset of layer 3 always reset layer 2 in ISDN-terminal equipment. If layer 3 can be reset without resetting layer 2, an ISDN terminal which is reset during the active phase of a call, may lose control over that call.

#### **3.3 Layer Three Protocol for Basic Call Control (DSS1)**

The DSS1 layer three protocol for basic call control is contained in the base standard ETS 300 102-1 (12/90), ITU-T Q.931 (3/93), ETS 300 403-1 (11/95) and EN 300 403-1 (11/99). ). The EN 300 403-1 (11/99) is a main standard for DSSI Layer 3 implementation.

When implementing the DSS1 layer three protocol in Malaysia network, the following guidelines are recommended to be taken into account (The main numbering refers to the ITU-T Q.931 (3/93), this standard had been adopted and extended by EN 300 403-1 (11/99).

**Table 13. Appendices**

<b>Clause No.</b>	<b>Clause Description</b>	<b>Recommendation</b>
2	OVERVIEW OF CALL CONTROL	SDL diagrams in the standard ETS 300 403-2 (11/95) are recommended to be used as informative.
3.1.3	CONNECT	The transport of low layer compatibility information element (LLC) to the calling user is supported on the ISDN end-to-end connections.  The date/time information element is recommended to be sent by the network.
3.1.6	INFORMATION	The use of Keypad facility information element is defined in EN 300 122-1 (6/98), "Integrated Services Digital Network (ISDN); Generic keypad protocol for the support of supplementary services; Digital Subscriber Signaling System No. One (DSS1) protocol; Part 1: Protocol Specification".

Table 13. Appendices (continued)

Clause No.	Clause Description	Recommendation
3.1.14	SETUP	<p>Annex E (network specific facility selection) and Annex C (transit network selection) are not applicable. Transit network selection is implemented in the DSS1 signaling by using operator codes in the called number digits (operator code + called party number).</p> <p>The use of Keypad facility information element is defined in EN 300 122-1 (6/98).</p> <p>Two bearer capability information elements are supported (EN 300 403-1 (11/99), subclause 5.11).</p> <p>Two high layer compatibility information elements are supported (EN 300 403-1(11/99), subclause 5.12)</p>
4	General message format and information elements coding	
4.4	MESSAGE TYPE	No national message types are defined.
4.5.1.1 (EN 300 403-1 11/99)	Codeset 0	Information elements Network specific facilities, Transit network selection and Escape for extension are not applicable.
4.5.2	Extension of codesets	No information elements belonging to codeset 6 (national) are defined.
4.5.7	Call state	Only CCITT standardized coding is used.
4.5.8	Called party number	<p>Type of number: Code point showing "subscriber number" shall be used from network to user.</p> <p>The code point used in connection with the supplementary services Direct Dialing In (DDI) and Multiple Subscriber Number (MSN) is specified in a separate document for ISDN supplementary services Technical Guidelines of ISDN Supplementary Services(Functional Protocol)</p>
4.5.10	Calling party number	The use of the fields is subject to a separate document for ISDN supplementary services Technical Guidelines of ISDN Supplementary Services(Functional Protocol)
4.5.12	Cause	<p>Coding standard: Codepoints showing "CCITT standardized coding" and "National standard" may be used.</p> <p>No national cause values are defined.</p>
4.5.13	Channel identification	Coding standard: CCITT standardized coding is always used
4.5.15	Date/time	The date/time indicated is local date / time
4.5.21	Network specific facilities	Not applicable.
4.5.22	Progress indicator	Coding standard: CCITT standardized coding is always used.

Table 13. Appendices (continued)

Clause No.	Clause Description	Recommendation
4.5.29	Transit network selection	Not applicable. Transit network selection is implemented in the DSS1 signaling by using operator codes in the called number digits (operator code + called party number)
5	CIRCUIT-SWITCHED CALL CONTROL PROCEDURES	Optional extensions to the basic protocol and exceptions that apply in the case of supplementary services are not subject to this guideline document. An INFORMATION message received in the Release Request State shall be ignored.
5.1.1	Call request	The network shall recognize both the sending complete information element and the "#" character.
5.1.3	Overlap sending	In case (a) the dial tone option with Progress Indicator #8 is applied
5.1.10	Transit network selection	Not applicable. Transit network selection is implemented in the DSS1 signaling by using operator codes in the called number digits (operator code + called party number).
5.2	CALL ESTABLISHMENT AT THE DESTINATION INTERFACE	It is recommended for the basic access that a timer is implemented on the network side in order to ensure that layer 2 is released if during a time period, (e.g. 10-15 seconds) no layer 3 connections are present on the data link.  In special cases, e.g. NT2, data link connections may be established as soon as TEI is assigned (either locally or by the automatic assignment procedure), and may be retained indefinitely.  It is recommended that a reset of layer 3 always reset layer 2 in ISDN-terminal equipment. If layer 3 can be reset without resetting layer 2, an ISDN terminal which is reset during the active phase of a call, may lose control over that call.
5.2.1	Incoming call	The network shall have the knowledge that a single-point configuration exists, and that information is entered at the time of configuration of the access.
5.2.3.1	SETUP message delivered by point-to-point data link	Only options 1) "channel is indicated, no acceptable alternative" and 4) "no B channel available" are used.
5.2.4	Overlap receiving	In overlap receiving the network cannot in all cases determine that sufficient call setup information has been received, and the Sending complete information element is not required (Refer to Technical Guidelines of ISDN Supplementary Services (Functional Protocol), DDI).

Table 13. Appendices (continued)

Clause No.	Clause Description	Recommendation
5.2.6	Notification of interworking at the terminating interface	Concerning the first subsection a) the normal call handling procedures shall be applied at the terminating exchange (i.e. the terminating exchange shall only through-connect after a CONNECT message has been received from the called user).
5.2.7	Call accept	In case the private exchange has diverted the speech call it is recommended that the Calling party is informed of the diversion (with an announcement) if the private exchange sends the call acceptance message (CONNECT) towards the Calling party before the call acceptance message has been received from the diverted connection. This in-band information is given immediately after the call acceptance message sending.  Note: Establishment of the bearer connection prior to call acceptance is described in ETS 300 403-1 Annex K. If this procedure is applied then the inband information is given prior the call acceptance message sending.
5.3.4.1	Clearing when tones/announcements provided	In order to receive the inband information it is recommended that the user connects to the B-channel on receipt of the DISCONNECT message with progress indicator No. 8.
5.3.4bis (EN 300 403-1 11/99)	Absence of response during call clearing	In case a B-channel is placed in a maintenance condition, the actions to be taken are described in subclause 5.5.
5.6.1	Call suspension	When the call identity is used, it is recommended for the terminals to use IA5-coded characters.
5.6.2	Call suspended	When the call identity is used, it is recommended for the terminals to use IA5- coded characters.
5.6.5	Call resume errors	The network shall preserve the call identity along with a clearing cause during the period of timer T307.
5.8.5.1	Information element out of sequence	The network is not required to process information elements received out of sequence
5.8.5.2	Duplicated information elements	The BC (Bearer Capability) and HLC (High Layer Compatibility) information elements may be duplicated in the SETUP message (EN 300 403-1 (11/99), subclause 5.11 and 5.12).
5.8.7.2	Non-mandatory information element content error	Information elements exceeding the maximum length shall not be truncated and processed except the call identity information element.
5.8.9	Data link failure	It is recommended that the network transmits a STATUS ENQUIRY message when layer 2 is re-established.
5.11	Signaling procedures for bearer capability selection	Supported on ISDN end-to-end connections (i.e. the network signaling system is ISUP).

Table 13. Appendices (continued)

Clause No.	Clause Description	Recommendation
5.12	Signaling procedures for high layer compatibility selection	Supported on ISDN end-to-end connections (i.e. the network signaling system is ISUP).
9.1	Timers in the network side	Timer No. 302 : Time-out value is 5s
9.2	Timers in the user side	Timer No. 301 : Time-out value is 3 min.
Annex B	Compatibility and address checking	
B.1	INTRODUCTION	Codings of BC, HLC and LLC are subject to the ETR 018 (11/95).
B.3.1	COMPATIBILITY CHECKING WITH ADDRESSING INFORMATION	Called party number (whole subscriber number) is always included in the SETUP message from the network to user in point-to-multipoint configurations.  Compatibility checking with addressing information should be used in terminals, since otherwise it may restrict the use of several terminals in the same access or the use of multi-service terminals. (Further information can be found in the supplementary services guideline document Technical Guidelines of ISDN Supplementary Services (Functional Protocol), e.g. Multiple Subscriber Number supplementary service).
B.4	INTERWORKING WITH EXISTING NETWORKS	When a Progress indicator information element #1 or #3 is sent to the terminal equipment, the network will not send the High layer or Low layer compatibility information elements to the terminal equipment. The terminal equipment should in this case use compatibility checking only with Addressing Information and Bearer Capability. When the High layer and/or Low layer information elements are sent to the terminal equipment, the terminal equipment shall use them in the compatibility checking.
Annex C	Transit network selection	Not applicable.
Annex D	Extensions for symmetric call operation	Not applicable.
Annex E	Network specific facility selection	Not applicable.
Annex F	D-channel backup procedures	Not applicable.
Annex J	Low layer compatibility negotiation	The transport of LLC to the calling user is only supported on the ISDN end-to-end connections.
Annex I	Definition of causes values	Applicable after taking into account the national selections (concerning cause values, messages etc.) made in this guideline document.



#### **4. Terminal Characteristics Related to Access Signaling**

Terminal characteristics related to access signaling and used for type approval purposes are contained in standards ETS 300 085(12/90), ETS 300 087 (4/94), ETS 300 104 (6/94), NET 003 (9/95), NET 005 (9/95), I-ETS 300 245-1 (2/96), TBR 003 (11/95), TBR 003/A1 (2/98), TBR 004 (11/95), TBR 004/A1 (2/98), TBR 008(9/94), TBR 008(10/98), TBR 008/C2 (2/2001) and the corresponding CTRs.

#### **5. Terminal Adaptors**

##### **5.1 Circuit Mode Bearer Services**

Terminal adaptor functions and associated access signaling requirements for circuit mode bearer services are contained in the standard ETS 300 103 (12/90).

## Section E

### Digital Transmission System on Metallic Local Lines for ISDN Basic Rate Access (ITU-T Recommendation G.961 03/1993)

Table 14. Digital transmission system on metallic local lines for ISDN basic rate access

Title	ITU-T Rec. G.961	ETSI ETR 080	CR	Remarks
General	1	1 to 3	GID	
Functions	2	4	M	Bit timing shall be derived from the clock received by the NT1 from LT. 8 kHz octet timing is derived from frame alignment. Remote power feeding is supported.
Transmission Medium	3	5	GID	The transmission medium is the local line distribution network.
System Performance	4	6	GID	
Transmission method	5	7	M	Duplex transmission on 2-wire metallic local lines shall be achieved through the use of Echo Cancellation (ECH).
Activation / Deactivation	6	8	–	Heading
General	6.1	8.1	GID	
Physical representation of signals	6.2	8.2	M	The signals used in the DTS are in accordance with the requirements for a system using 2B1Q line code as given in Appendix II/ G.961.
Operation and Maintenance	7	9	–	Heading
Operation and maintenance functions	7.1	9.1	GID	
C <sub>L</sub> channel	7.2	9.2	M	
Power Feeding	8	10	–	Heading
General	8.1	10.1	GID	
Power feeding options	8.2	10.2	M	Power feeding of NT1 (to TE) under normal conditions will be provided by the AC mains power.
			O	A restricted condition will be entered into when AC mains power at the NT1 fails.
Power feeding and recovery methods	8.3	–	GID	
DLL resistance	8.4	10.3	GID	
Wetting current	8.5	10.4	O	The NT1 shall sink a current of at least 200µA in its operating voltage range.

**Table 14. Digital transmission system on metallic local lines for ISDN basic rate access**  
(continued)

Title	ITU-T Rec. G.961	ETSI ETR 080	CR	Remarks
LT aspects	8.6	10.5	M	The NT1 shall be able to work with DC input voltages of $\leq 95$ V coming from the DLL.
Power requirements of NT1 and regenerator	8.7	10.6	–	Heading
Power requirements of NT1	8.7.1	10.6.1	M	
Power requirements of regenerator	8.7.2	10.6.2	NA	
Current transient limitation	8.8	10.7	M	$< 1$ mA/ $\mu$ s
Environmental Conditions	9	11	GID	

**Table 15. Core requirements for a system using 2B1Q line code (ITU-T Rec. Q.961 Appendix II)**

Title	ITU-T Rec. G.961	ETSI ETR 080	CR	Remarks
Line code	II.1	A.1	M	The line code shall be 2B1Q (2 binary, 1 quaternary).
Line baud rate	II.2	A.2	M	The line symbol rate is 80 kbauds.
Clock tolerance	II.2.1	–		Heading
NT1 clock tolerance	II.2.1.1	A.2.1	M	$\pm 100$ ppm NT1 shall operate with the received signal baud rate in the range of 80 kbaud $\pm 5$ ppm.
LT clock tolerance	II.2.1.2	A.2.2	GID	$\pm 5$ ppm
REG clock tolerance	–	A.2.3	GID	
Frame structure	II.3	A.3	M	Figure II.2/G.961
Frame length	II.3.1	A.3.1	M	120 quaternary
Bit allocation in direction LT-NT1	II.3.2	A.3.2	M	Figures II.1/G.961 and II.2/G.961
Bit allocation in direction NT1-LT	II.3.3	A.3.3	M	Figures II.1/G.961 and II.2/G.961
Frame word	II.4	A.4	M	
Frame alignment procedure	II.5	A.5	M	The time limits specified in II.10 shall be met.
Multiframe	II.6	A.6	M	A multiframe is used to enable the allocation of the C <sub>L</sub> -channel bits over more than one frame.

**MCMC MTSFB TC T008:2014**

**Table 15. Core requirements for a system using 2B1Q line code (ITU-T Rec. Q.961 Appendix II)**  
(continued)

Title	ITU-T Rec. G.961	ETSI ETR 080	CR	Remarks
C <sub>L</sub> -channel	II.8	A.8	M	The bit rate for the C <sub>L</sub> -channel is 4 kbit/s.
Bit rate	II.8.1	A.8.1	M	
Structure	II.8.2	A.8.2	M	Figure II.3/G.961
Protocol and procedures	II.8.3	A.8.3	M	Figure II.3/G.961
Error monitoring functions	II.8.3.1	A.8.3.1	M	
Other C <sub>L</sub> -channel functions	II.8.3.2	A.8.3.2	M	
Far end block error (FEBE) bit. mandatory	II.8.3.2.1	A.8.3.2.1	M	
The ACT bit, mandatory	II.8.3.2.2	A.8.3.2.2	M	
The DEA bit, mandatory	II.8.3.2.3	A.8.3.2.3	M	
NT1 power status bits	II.8.3.2.4	A.8.3.2.4	O	
NT1 test mode indicator (NTM) bit	II.8.3.2.5	A.8.3.2.5	O	
Cold-start-only (CSO) bit	II.8.3.2.6	A.8.3.2.6	O	
DLL-only-activation (UOA) bit	II.8.3.2.7	A.8.3.2.7	O	
S/T-interface-activity-indicator (SAI) bit	II.8.3.2.8	A.8.3.2.8	O	
Alarm indicator bit (AIB)	II.8.3.2.9	A.8.3.2.9	O	
Network indicator bit (NIB) for network use	II.8.3.2.10	A.8.3.2.10	M	The NT1 shall always set this bit to binary ONE in SN3.
Reserved bits	II.8.3.2.11	A.8.3.2.11	M	
Embedded operations channel (EOC) functions	II.8.3.3	A.8.3.3	M	
Scrambling	II.9	A.9	M	
Start-up and control	II.10	A.10 Note	M	The NT1 shall be able to support both cold-start and warm-start.
Signals used for start-up and control	II.10.1	A.10.1	M	
Timers	II.10.2	A.10.2	M	
Description of the start-up procedure	II.10.3	A.10.3	M	Heading
State transition table for the NT1	II.10.4	A.10.4	M	
State transition table for the LT	II.10.5	A.10.5	GID	
Activation times	II.10.6	A.10.6	M	

**Table 15. Core requirements for a system using 2B1Q line code (ITU-T Rec. Q.961 Appendix II)**  
(continued)

Title	ITU-T Rec. G.961	ETSI ETR 080	CR	Remarks
Jitter	II.11	A.11	M	
Input signal jitter tolerance	II.11.1	A.11.1	M	Figure II.10/G.961
NT1 output jitter limitations	II.11.2	A.11.2	M	
LT input signal jitter tolerance	II.11.3	A.11.3	GID	
LT output jitter and synchronisation	II.11.4	A.11.4	GID	
Test conditions for jitter measurement	II.11.5	A.11.5	GID	
Transmitter output characteristics of NT1 and LT	II.12	A.12	M	Load impedance of 135 ohms resistive over a frequency band of 0 Hz to 160 kHz
Pulse amplitude	II.12.1	A.12.1	M	2.5 V (Figure II.11/G.961)
Pulse shape	II.12.2	A.12.2	M	The transmitted pulse shall have the shape specified in Figure II.11/G.961. The pulse mask for the four quaternary symbols shall be obtained by multiplying the normalized pulse mask shown in Figure II.11 by 2.5 V, 5/6 V, -5/6 V or -2.5 V.
Signal power	II.12.3	A.12.3	M	Between 13.0 dBm and 14.0 dBm over the frequency band from 0 Hz to 80 kHz
Power spectral density	II.12.4	A.12.4	M	Figure II.12/G.961
Transmitter linearity	II.12.5	A.12.5	M	
Transmitter/receiver termination	II.13	A.13	–	Heading
Impedance	II.13.1	A.13.1	M	135 $\Omega$
Return loss	II.13.2	A.13.2	M	Figure II.14/G.961
Longitudinal conversion loss	II.13.3	A.13.3	M	Figure II.15/G.961
NOTE: The use of cold-start-only transceivers is outside the scope of ETR 080.				

**MCMC MTSFB TC T008:2014**

**Table 16. Extension functions of the system using 2B1Q line code  
(Annex A to ITU-T Rec. Q.961 Appendix II)**

Title	ITU-T Rec. G.961	ETSI ETR 080	CR	Remarks
Introduction	A.II.1	I-1	GID	
NT1 power status bits	A.II.2	I-2	O	
NT1 test mode indicator (NTM) bit	A.II.3	I-3	O	
Cold-start-only (CSO) bit	A.II.4	I-4	O	
DLL-only -activation (UOA) bit	A.II.5	I-5	O	
S/T-interface-activity-indicator (SAI) bit	A.II.6	I-6	O	
Alarm indicator bit (AIB)	A.II.7	I-7	O	
Longitudinal output voltage	A.II.8	–	GID	
NT1 maintenance modes	A.II.9	–	O	
NT1 Quiet Mode	A.II.9.1	–	O	
Insertion Loss Measurement Test	A.II.9.2	–	O	
NT1 Quiet Mode and Insertion Loss Measurement Test trigger signal	A.II.9.3	–	O	
Dc signaling format	A.II.9.4	–	O	
Low frequency ac signaling format	A.II.9.5	–	O	

**Annex A**  
(Normative)

**Normative References**

Erratum1 (02/2003) to ITU-T Rec. Q.931	ISDN User-Network Interface Layer 3 Specification for Basic Call Control
ETR 080 Nov 96	Digital transmission system on metallic local lines
ETSI TBR 3 Nov 95	Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access
ETSI TBR 3 A1 Dec 97	This amendment A1 modifies the TBR 3 (1995)
IEC 60950-1: 2001	Information Technology Equipment – Safety
IEC CISPR 22: 2003-04	Information Technology Equipment – Radio disturbance characteristics – Limits and methods of measurement
ITU-T Rec. I.430 (11/95)	Basic User-Network Interface – Layer 1 Specification
ITU-T Rec. Q.921 (09/97)	ISDN User-Network Interface – Data Link Layer Specification
ITU-T Rec. Q.921 Amendment 1 (02/2000)	ISDN User-Network Interface – Data Link Layer Specification Amendment 1
[ITU-T Recommendation Q.931 (1993), modified] (EN 300 403-1 11/99)	Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No. One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification
ITU-T Rec. Q.931 Amendment 1 (05/98)	ISDN User-Network Interface Layer 3 Specification for Basic Call Control Amendment 1 Extensions for the support of digital multiplexing equipment
ITU-T Rec. G.961 03/93	Digital Transmission System on Metallic Local Lines for ISDN Basic Rate Access

NOTES:

ETSI	European Telecommunications Standards Institute
ETR	ETSI Technical Report
IEC	International Electro-technical Commission
ITU-T	International Telecommunication Union – Telecommunication Sector
TBR	Technical Basis for Regulation

**Annex B**  
(Informative)

**TECHNICAL GUIDELINES OF ISDN SUPPLEMENTARY SERVICE**

**B1 Introduction**

This section contains clarifications and recommended option selections for the ETSI ISDN standards related to ISDN supplementary services. This document covers the implementation of ISDN supplementary services using functional protocol. The aim of this document is to avoid unnecessary options and vagueness in ISDN implementations and to ensure the interoperability of ISDN networks and terminal equipment in Malaysia.

**B2 Supporting Information**

B2.1 Integrated Services Digital Network (ISDN); Multiple Subscriber Number (MSN) supplementary service; Service Description (ETS 300 050, October 1991)

B2.2 Integrated Services Digital Network (ISDN); Multiple Subscriber Number (MSN) supplementary service; Functional capabilities and information flows (ETS 300 051, October 1991)

B2.3 Integrated Services Digital Network (ISDN); Multiple Subscriber Number (MSN) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 052-1, October 1991)

B2.4 Integrated Services Digital Network (ISDN); Terminal Portability (TP) supplementary service; Service Description (ETS 300 053, October 1991)

B2.5 Integrated Services Digital Network (ISDN); Terminal Portability (TP) supplementary service; Functional capabilities and information flows (ETS 300 054, October 1991)

B2.6 Integrated Services Digital Network (ISDN); Terminal Portability (TP) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 055-1, October 1991)

B2.7 Integrated Service Digital Network (ISDN); Call Waiting (CW) supplementary service; Service Description (ETS 300 056, October 1991) and Amendment A1 (September 1996)

B2.8 Integrated Services Digital Network (ISDN); Call Waiting (CW) supplementary service; Functional capabilities and information flows (ETS 300 057, May 1992)

B2.9 Integrated Services Digital Network (ISDN); Call Waiting (CW) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 058-1, October 1991)

B2.10 Integrated Services Digital Network (ISDN); Sub-addressing (SUB) supplementary service; Service Description (ETS 300 059, October 1991)

B2.11 Integrated Services Digital Network (ISDN); Sub-addressing (SUB) supplementary service; Functional capabilities and information flows (ETS 300 060, October 1991)



## **MCMC MTSFB TC T008:2014**

B2.12 Integrated Services Digital Network (ISDN); Sub-addressing (SUB) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 061-1, October 1991)

B2.13 Integrated Services Digital Network (ISDN); Direct Dialing In (DDI) supplementary service; Service Description (ETS 300 062, October 1991)

B2.14 Integrated Services Digital Network (ISDN); Direct Dialing In (DDI) supplementary service; Functional capabilities and information flows (ETS 300 063, October 1991)

B2.15 Integrated Services Digital Network (ISDN); Direct Dialing In (DDI) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 064-1, October 1991)

B2.16 Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) supplementary service; Service description (ETS 300 089, January 1992)

B2.17 Integrated Services Digital Network (ISDN); Calling Line Identification Restriction (CLIR) supplementary service; Service description (ETS 300 090, January 1992)

B2.18 Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) and Calling Line Identification Restriction (CLIR) supplementary services; Functional capabilities and information flows (ETS 300 091, March 1992)

B2.19 Integrated Services Digital Network (ISDN); Calling Line Identification Presentation (CLIP) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 092-1, March 1992), Amendment A1 (April 1993) and Amendment A2 (November 1994)

B2.20 Integrated Services Digital Network (ISDN); Calling Line Identification Restriction (CLIR) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 093-1, March 1992)

B2.21 Integrated Services Digital Network (ISDN); Connected Line Identification Presentation (COLP) supplementary service; Service description (ETS 300 094, January 1992)

B2.22 Integrated Services Digital Network (ISDN); Connected Line Identification Restriction (COLR) supplementary service; Service description (ETS 300 095, January 1992)

B2.23 Integrated Services Digital Network (ISDN); Connected Line Identification Presentation (COLP) and Connected Line Identification Restriction (COLR) supplementary services; Functional capabilities and information flows (ETS 300 096, May 1992)

B2.24 Integrated Services Digital Network (ISDN); Connected Line Identification Presentation (COLP) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 097-1, March 1992) and Amendment A1 (November 1994)

B2.25 Integrated Services Digital Network (ISDN); Connected Line Identification Restriction (COLR) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 098-1, May 1992)

B2.26 Integrated Services Digital Network (ISDN); Malicious Call Identification (MCID) supplementary service; Service description (ETS 300 128, May 1992)

B2.27 Integrated Services Digital Network (ISDN); Malicious Call Identification (MCID) supplementary service; Functional capabilities and information flows (ETS 300 129, May 1992)

## **MCMC MTSFB TC T008:2014**

B2.28 Integrated Services Digital Network (ISDN); Malicious Call Identification (MCID) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 130-1, May 1992)

B2.29 Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Service description (ETS 300 136, March 1992)

B2.30 Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Functional capabilities and information flows (ETS 300 137, May 1992)

B2.31 Integrated Services Digital Network (ISDN); Closed User Group (CUG) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 138-1, May 1992) and Amendment A1 (January 1996)

B2.32 Integrated Services Digital Network (ISDN); Call Hold (HOLD) supplementary service; Service description (ETS 300 139, March 1992)

B2.33 Integrated Services Digital Network (ISDN); Call Hold (HOLD) supplementary service; Functional capabilities and information flows (ETS 300 140, May 1992)

B2.34 Integrated Services Digital Network (ISDN); Call Hold (HOLD) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 141-1, May 1992) including Corrigendum (August 1993)

B2.35 Integrated Services Digital Network (ISDN); Advice of Charge: charging information at call set-up time (AOC-S) supplementary service; Service description (ETS 300 178, October 1992)

B2.36 Integrated Services Digital Network (ISDN); Advice of Charge: charging information during the call (AOC-D) supplementary service; Service description (ETS 300 179, October 1992)

B2.37 Integrated Services Digital Network (ISDN); Advice of Charge: charging information at the end of the call (AOC-E) supplementary service; Service description (ETS 300 180, October 1992)

B2.38 Integrated Services Digital Network (ISDN); Advice of Charge (AOC) supplementary service; Functional capabilities and information flows (ETS 300 181, April 1993)

B2.39 Integrated Services Digital Network (ISDN); Advice of Charge (AOC) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 182-1, April 1993)

B2.40 Integrated Services Digital Network (ISDN); Three-Party (3PTY) supplementary service; Service description (ETS 300 186, July 1993)

B2.41 Integrated Services Digital Network (ISDN); Three-Party (3PTY) supplementary service; Functional capabilities and information flows (ETS 300 187, August 1993)

B2.42 Integrated Services Digital Network (ISDN); Three-Party (3PTY) supplementary service; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 188-1, August 1993)

B2.43 Integrated Services Digital Network (ISDN); Supplementary Service Interactions; Digital Subscriber Signaling System No. one (DSS1) protocol, Part 1: Protocol specification (ETS 300 195-1, February 1995)

## **MCMC MTSFB TC T008:2014**

B2.44 Integrated Services Digital Network (ISDN); Generic functional protocol for the support of supplementary services; Digital Subscriber Signaling System No. one (DSS1) protocol (ETS 300 196-1, August 1993) and Amendment A1 (May 1995)

B2.45 Integrated Services Digital Network (ISDN); Call Forwarding Busy (CFB) supplementary service; Service description (ETS 300 199, December 1994)

B2.46 Integrated Services Digital Network (ISDN); Call Forwarding Unconditional (CFU) supplementary service; Service description (ETS 300 200, December 1994)

B2.47 Integrated Services Digital Network (ISDN); Call Forwarding No Reply (CFNR) supplementary service; Service description (ETS 300 201, December 1994) and Amendment A1 (September 1996)

B2.48 Integrated Services Digital Network (ISDN); Call Forwarding Busy (CFB) supplementary service; Functional capabilities and information flows (ETS 300 203, December 1994)

B2.49 Integrated Services Digital Network (ISDN); Call Forwarding Unconditional (CFU) supplementary service; Functional capabilities and information flows (ETS 300 204, December 1994)

B2.50 Integrated Services Digital Network (ISDN); Call Forwarding No Reply (CFNR) supplementary service; Functional capabilities and information flows (ETS 300 205, December 1994)

B2.51 Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signaling No. one (DSS1) protocol (ETS 300 207-1, December 1994) and Corrigendum (June 1995)

B2.52 Integrated Services Digital Network (ISDN); User-to-user signaling (UUS) supplementary service; Service description (ETS 300 284, March 1996)

B2.53 Integrated Services Digital Network (ISDN); User-to-user signaling (UUS) supplementary service; Functional capabilities and information flows (ETR 285, March 1996)

B2.54 Integrated Services Digital Network (ISDN); User-to-user signaling (UUS) supplementary service; Digital Subscriber Signaling one (DSS1) protocol (ETS 300 286-1, February 1993)

B2.55 Integrated Services Digital Network (ISDN); Explicit Call Transfer (ECT) supplementary service; Service description (EN 300 367, V1.2.1, October 1998)

B2.56 Integrated Services Digital Network (ISDN); Explicit Call Transfer (ECT) supplementary service; Functional capabilities and information flows (EN 300 368, V1.2.2, December 1998)

B2.57 Integrated Services Digital Network (ISDN); Explicit Call Transfer (ECT) supplementary service; Digital Subscriber Signaling one (DSS1) protocol (EN 300 369-1, V1.2.4, October 1998)

## **B3. National Option Selections and Clarifications**

### **B3.1 Generic functional protocol for the support of supplementary services**

The supplementary services of this specification are based on the functional protocol. Therefore, the public network shall support the generic part of the functional protocol according to ETS 300 196-1 [44].

Only those functions need to be implemented, which are required to support the selected supplementary services. Network options of ETS 300 196-1 are left as implementation options, unless stated otherwise in the Sub clauses relating to the individual supplementary services. Should any conflict arise between ETS 300 196-1 and the specifications in Sub clause 3.2 to 3.16, then the text of the individual supplementary services shall be taken as definitive.

### **B3.2 Multiple Subscriber Number (MSN)**

#### **B3.2.1 Definition**

The Multiple Subscriber Number (MSN) supplementary service provides the possibility for assigning multiple numbers to a single public or private access.

NOTE: This allows e.g.:

- 1) A calling user to select, via the public network, one or multiple distinct terminals out of multiple choices;
- 2) To identify the terminal to the network for the application of other supplementary services.

#### **B3.2.2 Service Description**

The service description (stage 1 description) for the MSN supplementary service is contained in the standard ETS 300 050 [1].

The following gives the recommended guidelines for the implementation of the MSN supplementary service in the Malaysian network.

Clause 5 and sub clause 6.2.3	The multiple subscriber number provided by the calling party shall be the full ISDN subscriber number.  The called party number to be transmitted to the user's installation shall comprise the full ISDN subscriber number
Sub clause 6.1	The maximum number of MSNs per access shall be 16
Sub clause 7.2	The MSN supplementary service can apply at an access to a private ISDN (e.g. when the public network does not know what equipment is connected to the access).
Clause 8	Supplementary services can be individually assigned to each MSN number.
Sub clause 8.9	Subscription to the DDI supplementary service and the MSN supplementary service is mutually exclusive.

## MCMC MTSFB TC T008:2014

### Additional requirement

On outgoing calls, when the screening of the calling party number is successful, the CLI to be recorded in the charging record shall be the MSN number provided by the calling party. If the number screening is unsuccessful, the default ISDN number of the access shall be recorded in the charging record.

### B3.2.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the MSN supplementary service are contained in the standard ETS 300 051 [2]. The stage 2 description can be taken as informative. The implementation of the MSN supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.2.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the MSN supplementary service is contained in the standard ETS 300 052-1 [3].

The following gives the recommended guidelines for the implementation of the MSN supplementary service in the Malaysian network.

Sub clause 6.2	If the access has the MSN supplementary service, the network may use the information in the calling party number information element to identify the calling terminal, and, if necessary, the appropriate basic or supplementary service.
Sub clause 9.2.1	The type of number indicated in the Called party number information element sent to the user shall be coded as "subscriber number" and the full appropriate number shall be sent.  The "numbering plan identification" field of the Called party number information element shall be coded "ISDN/telephony numbering plan" (ITU-T Recommendation E.164).
Sub clause 9.3.1	All the coding options provided in this sub clause shall be implemented in the network.

It is recommended that the type of number indicated in the Calling party number information element sent to the network shall be coded as "subscriber number" and the full appropriate number shall be sent.

## B3.3 Terminal Portability (TP)

### B3.3.1 Definition

The Terminal Portability (TP) supplementary service allows a user to move a terminal from one socket to another within one given basic access during the active state of a call. It also allows a user to move a call from one terminal to another terminal within one given basic access during the active phase of the call.

## MCMC MTSFB TC T008:2014

### B3.3.2 Service Description

The service description (stage 1 description) for the TP supplementary service is contained in the standard ETS 300 053 [4].

The following gives the recommended guidelines for the implementation of the TP supplementary service in the Malaysian network.

Sub clause 8.1.2	At call suspension request, the cumulative information (i.e. total charge incurred up to the moment when the call is suspended) shall be given.  On resumption of the call, the sending of charging information shall start again and the updated cumulative charging information shall be given.  If the call is cleared while the call is suspended at the calling user's access, and if the calling user attempts to resume the call within the timer, then, advice of charge information shall be given to the user at the time of the resume attempt.
Sub clause 8.1.3	If the call is cleared while the call is suspended at the calling user's access, and if the calling user attempts to resume the call within the timer, then advice of charge information can be given to the user at the time of the resume attempt

### B3.3.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the TP supplementary service are contained in the standard ETS 300 054 [5]. The stage 2 description can be taken as informative. The implementation of the TP supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.3.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the TP supplementary service is contained in the standard ETS 300 055-1 [6]. The TP supplementary service is implemented in the Malaysian network without national definitions or exceptions.

## B3.4 Call Waiting (CW)

### B3.4.1 Definition

The Call Waiting (CW) supplementary service allows a user to be informed of an incoming call (as per basic call procedures) with an indication that no interface information channel is available. The user then has the choice of accepting, rejecting or ignoring the waiting call (as per basic call procedures).

## MCMC MTSFB TC T008:2014

### B3.4.2 Service Description

The service description (stage 1 description) for the CW supplementary service is contained in the standard ETS 300 056 [7].

The following gives the recommended guidelines for the implementation of the CW supplementary service in the Malaysian network.

Clause 3 and sub clause 6.1	No specific time-out T2 will be used for no answer situation. Basic call timer shall apply in this case.
Clause 5	On the primary rate access, only notifications for the CW supplementary service are supported.  The maximum number of calls that the network must be able to handle (e.g. active, held, alerting, waiting) on the basic access is six (6).
Sub clause 6.1	The network will support the subscription option presented in Table 1.  The network will support value two (2) for the network provider option in Table 2. This is specified for all ISDN numbers on the basic access
Sub clause 7.1	In interworking cases with non-ISDNs, no special in-band indication will be provided to the calling user.

### B3.4.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the CW supplementary service are contained in the standard ETS 300 057 [8]. The stage 2 description can be taken as informative. The implementation of the CW supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.4.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the CW supplementary service is contained in the standard ETS 300 058-1 [9].

The following gives the recommended guidelines for the implementation of the CW supplementary service in the Malaysian network.

Sub clauses 9.5.1.1, 9.5.2, 9.6.1 and 9.6.2, and clauses 13 and 14	In the network side the basic call timer T301 is used
--	---

## MCMC MTSFB TC T008:2014

### B3.5 Sub addressing (SUB)

#### B3.5.1 Definition

The Sub addressing (SUB) supplementary service allows the called (served) user to expand his addressing capacity beyond the one given by the ISDN number.

#### B3.5.2 Service Description

The service description (stage 1 description) for the SUB supplementary service is contained in the standard ETS 300 059 [10].

The following gives the recommended guidelines for the implementation of the SUB supplementary service in the Malaysian network.

Sub clause 5.1	The 20 octets maximum size of is applied
----------------	--

#### B3.5.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the SUB supplementary service are contained in the standard ETS 300 060 [11]. The stage 2 description can be taken as informative. The implementation of the SUB supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

#### B3.5.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the SUB supplementary service is contained in the standard ETS 300 061-1 [12].

The following gives the recommended guidelines for the implementation of the SUB supplementary service in the Malaysian network.

Clause 5, note 2	The 20 octets maximum size of the sub address is applied.
------------------	---

### B3.6 Direct Dialing In (DDI)

#### B3.6.1 Definition

The DDI supplementary service enables a user to call directly via a public ISDN a user on a private ISDN by using the public ISDN numbering plan.



## MCMC MTSFB TC T008:2014

### B3.6.2 Service Description

The service description (stage 1 description) for the DDI supplementary service is contained in the standard ETS 300 062 [13].

The following gives the recommended guidelines for the implementation of the DDI supplementary service in Malaysian network.

Clause 5	The number of digits is defined on a per subscriber basis
Sub clauses 8.5.1 and 8.5.3	A special arrangement for not screening the user provided number may be applied. For network wide operation ISUP version 2 is required
Sub clause 8.12	If the DDI supplementary service is provided to the served user of the MCID supplementary service, then the MCID supplementary service shall be provided globally for the whole access. The network option on provision for specific ISDN numbers forming part of the DDI supplementary service is not supported.
Sub clause 8.13	The subscription to the DDI supplementary service and the Multiple Subscriber Number (MSN) supplementary service is mutually exclusive

### B3.6.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the DDI supplementary service are contained in the standard ETS 300 063 [14]. The stage 2 description can be taken as informative. The implementation of the DDI supplementary service in Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.6.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the DDI supplementary service is contained in the standard ETS 300 064-1 [15].

The following gives the recommended guidelines for the implementation of the DDI supplementary service in Malaysian network.

Sub clause 6.1, note	The subscription to the DDI supplementary service and the Multiple Subscriber Number (MSN) supplementary service is mutually exclusive.
----------------------	---

## B3.7 Calling Line Identification Presentation (CLIP) and Calling Line Identification Restriction (CLIR)

### B3.7.1 Definition

The CLIP supplementary service provides the called party with the possibility of receiving identification of the calling party.

The CLIR supplementary service enables the calling party to prevent presentation of its ISDN number to the called party.

## MCMC MTSFB TC T008:2014

### B3.7.2 Service Description

#### CLIP:

The service description (stage 1 description) for the CLIP supplementary service is contained in the standard ETS 300 089 [16].

The following gives the recommended guidelines for the implementation of the CLIP supplementary service in Malaysian network.

Sub clauses 6.1, 6.2.3.1, 7.2, 8.9 and 8.13	In case of two calling party number delivery option a special arrangement for not screening the user provided number may be applied. For network wide operation ISUP version 2 is required.
Sub clause 7.1	<p>The CLIP supplementary service is always applicable when interworking to non-ISDN has occurred.</p> <p>The calling line identity can be provided to called user in the ISDN if the identity has been received and it is known that presentation is not restricted.</p> <p>On calls to or via non-ISDN, the originating network may restrict calling line identity from being forwarded to the destination network when the CLIR supplementary service is applicable (see also ETS 300 090, sub clause 7.1).</p>
Sub clause 8.5.2	Technical capabilities to provide override category service have to be available in Malaysian network
Annex A	The two calling party number delivery option is applicable. For network wide operation ISUP version 2 is required.

#### CLIR:

The service description (stage 1 description) for the CLIR supplementary service is contained in the standard ETS 300 090 [17].

The following gives the recommended guidelines for the implementation of the CLIR supplementary service in the Malaysian network.

Clause 3, and sub clauses 6.2.3.2 (note 1) and 8.5.1	Technical capabilities to provide override category service have to be available in the Malaysian network
Sub clause 6.1	Both subscription options, permanent mode and temporary mode (defaults: presentation restricted and presentation not restricted), are offered
Sub clause 7.1	On calls to or via non-ISDNs, it cannot be assured that a restriction indication can be carried to the destination network. The originating network in Malaysia may restrict any information identifying the calling user from being forwarded to the destination network when the CLIR supplementary service is applicable

## MCMC MTSFB TC T008:2014

### B3.7.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the CLIP and CLIR supplementary services are contained in the standard ETS 300 091 [18]. The stage 2 description can be taken as informative. The implementation of the CLIP and CLIR supplementary services in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.7.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

#### CLIP:

The DSS1 protocol (stage 3 description) for the CLIP supplementary service is contained in the standard ETS 300 092-1 [19].

The following gives the recommended guidelines for the implementation of the CLIP supplementary service in the Malaysian network.

Sub clauses 6.2 and 9.4	In case of two calling party number delivery option a special arrangement for not screening the user provided number may be applied. For networkwide operation ISUP version 2 is required.
Sub clause 9.2.1	It is recommended for the coding of the calling party information element sent by the calling user:  -The "numbering plan identification" field shall be coded "ISDN/Telephony numbering plan".  In case DDI is not activated for the same access:  - The "type of number" field shall be coded "subscriber number" and the full ISDN subscriber number shall be sent.  In case DDI is activated for the same access:  - The "type of number" field shall be coded "unknown" and only the extension number of the calling party shall be sent. The network then completes the calling party number by adding the national number of the access to the calling party number information element.
Sub clause 9.3.1	Networks in Malaysia may accept a full ISDN number in a Calling party number information element with the addition of a prefix or escape digits to the number digits field and the type of number field set to "National Number
Sub clause 9.5.1 and Table 1, note 7	The coding of the calling party information element sent by the destination local exchange:  - The "numbering plan identification" field shall be coded "ISDN/Telephony numbering plan";  - The "type of number" field shall be coded "unknown", and the number is organized according to the network dialing plan.

## MCMC MTSFB TC T008:2014

Clause 11	The following option is according to the network rules and operations in Malaysia:  - The network shall send the Calling party number information element according to sub clause 9.5.1, fifth paragraph and shall include no Calling party sub address information element.
Annex B	The two Calling party number information elements delivery option is applicable. For network wide operation ISUP version 2 is required

### CLIR:

The DSS1 protocol (stage 3 description) for the CLIR supplementary service is contained in the standard ETS 300 093-1 [20]. The following gives the recommended guidelines for the implementation of the CLIR supplementary service in the Malaysian network.

Clause 11	On calls to or via non-ISDNs, the originating network may restrict calling line identity from being forwarded to the destination network when the CLIR supplementary service is applicable.
-----------	---

## **B3.8 Connected Line Identification Presentation (COLP) and Connected Line Identification Restriction (COLR)**

### **B3.8.1 Definition**

The COLP supplementary service provides the calling party with the possibility to receive identification of the connected party.

The COLR supplementary service enables the connected party to prevent presentation of its ISDN number to the calling party.

### **B3.8.2 Service Description**

#### COLP:

The service description (stage 1 description) for the COLP supplementary service is contained in the standard ETS 300 094 [21].

The following gives the recommended guidelines for the implementation of the COLP supplementary service in the Malaysian network.

Sub clauses 6.1, 6.2.3.1, 7.2, 8.9 and 8.13	A special arrangement for not screening the user provided number may be applied. For networkwide operation ISUP version 2 is required.
Sub clause 7.1	The use of the COLP supplementary service can be guaranteed only when the call is end-to end ISDN.
Sub clauses 8.5.4 and 8.10	Technical capabilities to provide override category service have to be available in the Malaysian network

## MCMC MTSFB TC T008:2014

### COLR:

The service description (stage 1 description) for the COLR supplementary service is contained in the standard ETS 300 095 [22].

The following gives the recommended guidelines for the implementation of the COLR supplementary service in the Malaysian network.

Clause 3, and sub clauses 6.2.3.2, 8.5.3 and 8.10	Technical capabilities to provide override category service have to be available in the Malaysian network
Sub clause 6.1	Both subscription options, permanent mode and temporary mode (defaults: presentation restricted and presentation not restricted), are offered.
Sub clause 7.1	Destination network in Malaysia may restrict any information identifying the connected party from being returned to the originating network when the COLR supplementary service has been invoked

### **B3.8.3 Functional Capabilities and Information Flows**

The functional capabilities and information flows (stage 2 description) for the COLP and COLR supplementary services are contained in the standard ETS 300 096 [23]. The stage 2 description can be taken as informative. The implementation of the COLP and COLR supplementary services in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### **B3.8. Digital Subscriber Signaling System No. One (DSS1) Protocol**

#### COLP:

The DSS1 protocol (stage 3 description) for the COLP supplementary service is contained in the standard ETS 300 097-1 [24].

The following gives the recommended guidelines for the implementation of the COLP supplementary service in the Malaysian network.

Sub clauses 6.3 and 9.4	A special arrangement for not screening the user provided number may be applied. For network wide operation ISUP version 2 is required
Sub clause 9.2.1	It is recommended for the coding of the connected party information element sent by the connected user:  - The "numbering plan identification" field shall be coded "ISDN/Telephony numbering plan";  - The "type of number" field shall be coded "subscriber number" and the full ISDN subscriber number shall be sent.
Sub clause 9.3.1	Networks in Malaysia may accept a full ISDN number in a Connected party number information element with the addition of a prefix or escape digits to the number digits field and the type of number field set to "National Number

## MCMC MTSFB TC T008:2014

Sub clause 9.5.1 and Table 1, note 7	The coding of the connected party information element sent by the originating local exchange: - The "numbering plan identification" field shall be coded "ISDN/Telephony numbering plan"; - The "type of number" field shall be coded "unknown", and the number is organized according to the network dialing plan
--------------------------------------	---

### COLR:

The DSS1 protocol (stage 3 description) for the COLR supplementary service is contained in the standard ETS 300 098-1 [25].

The following gives the recommended guidelines for the implementation of the COLR supplementary service in the Malaysian network.

Clause 11	Destination network in Malaysia may restrict any information identifying the connected party from being returned to the originating network when the COLR supplementary service has been invoked
-----------	--

## **B3.9 Malicious Call Identification (MCID)**

### **B3.9.1 Definition**

The MCID supplementary service enables a user to request that the source of an incoming call is identified and registered by the network.

### **B3.9.2 Service Description**

The service description (stage 1 description) for the MCID supplementary service is contained in the standard ETS 300 128 [26].

The following gives the recommended guidelines for the implementation of the MCID supplementary service in the Malaysian network.

Clause 5	The network will support the registration of calling party sub address.
Sub clauses 5, 6.1 and 6.2.3	The network will not support the automatic invocation of the service on unanswered calls.
Sub clause 6.2.3	The network will not support the continuation of the call to be presented after the calling user has cleared.
Sub clause 7.1	When interworking between the PSTN and the ISDN occurs and if the number of the calling user is not available, the network will support the option of registering information about the routing of the call.  The option in the note is not supported.

## MCMC MTSFB TC T008:2014

Sub clause 8.9	The network will not provide the service for specific ISDN numbers forming part of the DDI supplementary service
Sub clauses 8.10.1, 8.10.2 and 8.10.3	The network will support the registration of the last diverting user
Sub clause 8.11	The network will not support the registration of the called free phone number

### B3.9.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the MCID supplementary service are contained in the standard ETS 300 129 [27]. The stage 2 description can be taken as informative. The implementation of the MCID supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.9.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the MCID supplementary service is contained in the standard ETS 300 130-1 [28].

The following gives the recommended guidelines for the implementation of the MCID supplementary service in the Malaysian network.

Clause 3	The call information shall include the calling party sub address, if provided by the calling user
----------	---

### B3.10 Closed User Group (CUG)

#### B3.10.1 Definition

The CUG supplementary service enables users to form groups to and from which access is restricted. A specific user may be a member of one or more closed user groups. Members of a specific closed user group can communicate among themselves but not, in general, with users outside the group.

#### B3.10.2 Service Description

The service description (stage 1 description) for the CUG supplementary service is contained in the standard ETS 300 136 [29].

The following gives the recommended guidelines for the implementation of the CUG supplementary service in the Malaysian network.

Sub clause 6.1	The maximum number of closed user groups which can be allocated to an individual user is 75. All the subscription options defined in this Sub clause are supported
----------------	--

## MCMC MTSFB TC T008:2014

### B3.10.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the CUG supplementary service are contained in the standard ETS 300 137 [30]. The stage 2 description can be taken as informative. The implementation of the CUG supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.10.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the CUG supplementary service is contained in the standard ETS 300 138-1 [31].

The following gives the recommended guidelines for the implementation of the CUG supplementary service in the Malaysian network.

Sub clause 6.1	All the subscription options defined in this Sub clause are supported.
Sub clause 9.2.4.1 b)	The return error component shall be retained along with the ETS 300 403-1 cause.

### B3.11 Call Hold (HOLD)

#### B3.11.1 Definition

The HOLD supplementary service allows a user to interrupt communications on an existing call and then subsequently, if desired, re-establish communications.

#### B3.11.2 Service Description

The service description (stage 1 description) for the HOLD supplementary service is contained in the standard ETS 300 139 [32].

The following gives the recommended guidelines for the implementation of the HOLD supplementary service in the Malaysian network.

Clause 5	On the primary rate access, only notifications for the HOLD supplementary service are supported.
Sub clause 6.2.3.1	The network may support the option: A call can be placed on hold after the call has been offered to the called user.  The sending of notifications to the remote user is supported.
Sub clause 6.2.3.2	The sending of notifications to the remote user is supported
Sub clause 7.1, note	If a remote user is a PSTN user, the notifications about the hold request or retrieve request of the call to that user are not supported. The last sentence of the note is not applicable



## MCMC MTSFB TC T008:2014

### B3.11.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the HOLD supplementary service are contained in the standard ETS 300 140 [33]. The stage 2 description can be taken as informative. The implementation of the HOLD supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.11.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the HOLD supplementary service is contained in the standard ETS 300 141-1 [34].

The following gives the recommended guidelines for the implementation of the HOLD supplementary service in the Malaysian network.

Clause 9, and Sub clauses 9.1.1, 9.2.1 and 9.4.1	The user A at the originating side can hold a call in the Call Delivered state (U4).
--	--

### B3.12 Advice of Charge (AOC)

#### B3.12.1 Definition

Advice of Charge (AOC) is a group of supplementary services allowing the served user to be informed of usage-based charging information.

The AOC group of supplementary services includes the following:

AOC-S Advice of Charge, charging information at call set-up time; AOC-D Advice of Charge, charging information during the call; AOC-E Advice of Charge, charging information at the end of a call.

#### B3.12.2 Service Description

##### AOC-S:

The service description (stage 1 description) for the AOC-S supplementary service is contained in the standard ETS 300 178 [35].

The following gives the recommended guidelines for the implementation of the AOC-S supplementary service in the Malaysian network.

Clause 5	The AOC-S supplementary service is applicable only in relation to time tariff setting at call establishment and time tariff changes
Sub clause 8.16	No charging information for the use of the Three-Party supplementary service can be sent to the served user

## MCMC MTSFB TC T008:2014

### AOC-D:

The service description (stage 1 description) for the AOC-D supplementary service is contained in the standard ETS 300 179 [36].

The following gives the recommended guidelines for the implementation of the AOC-D supplementary service in the Malaysian network.

Sub clause 6.2.3	The value of the timer t shall be 10 seconds
Sub clause 8.15	The cumulative charging information is given in all the described cases: at the suspension request, on the resumption of the call, and if the call is terminated while the call is suspended at the calling user's access and the calling user attempts to resume the call within the timer.
Sub clause 8.16	No charging information for the use of the Three-Party supplementary service can be sent to the served user.
Annex A, Sub clause A.2.1	The Malaysian network may not include some charges, e.g. charges incurred by the use of some supplementary services, in the subtotal charges and/or the total charges
Annex A, Sub clause A.3	Charging information (AOC) can be given in currency units or metering pulses according to access arrangements.

### AOC-E:

The service description (stage 1 description) for the AOC-E supplementary service is contained in the standard ETS 300 180 [37].

The following gives the recommended guidelines for the implementation of the AOC-E supplementary service in the Malaysian network.

Sub clause 8.4	After a call has been transferred and the transferring user is charged for that transferred part of the call, and the AOC-E supplementary service has been invoked for that call, then the charging information shall be sent to the transferring user when the call is terminated.
Sub clauses 8.10.1, 8.10.2 and 8.10.3	Forwarding user: When a call is forwarded and the forwarding user is charged for the forwarded part of the call, then the charging information shall be sent to the forwarding user when the call is terminated provided that the served user has subscribed to the AOC-E supplementary service with the value of the subscription option set to "for all calls automatically"
Sub clause 8.15	If the call is terminated while the call is suspended at the calling user's access, and if the calling user attempts to resume the call within the timer, then advice of charge information shall be given to that user at the time of the resume attempt
Sub clause 8.16	No charging information for the use of the Three-Party supplementary service can be sent to the served user

## MCMC MTSFB TC T008:2014

Annex A, Sub clause A.2.1	The Malaysian network may not include some charges, e.g. charges incurred by the use of some supplementary services, in the subtotal charges and/or the total charges
Annex A, Sub clause A.3	Charging information (AOC) can be given in currency units or metering pulses according to access arrangements

### B3.12.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the AOC supplementary service are contained in the standard ETS 300 181 [38]. The stage 2 description can be taken as informative. The implementation of the AOC supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.12.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the AOC supplementary service is contained in the standard ETS 300 182-1 [39]. The AOC supplementary service is implemented in the Malaysian network without national definitions or exceptions.

### B3.13 Three Party (3PTY)

#### B3.13.1 Definition

The 3PTY supplementary service enables a user to establish, participate in and control, a three-way conversation, i.e. a simultaneous communication involving the served user and two remote parties.

#### B3.13.2 Service Description

The service description (stage 1 description) for the 3PTY supplementary service is contained in the standard ETS 300 186 [40].

The following gives the recommended guidelines for the implementation of the 3PTY supplementary service in the Malaysian network.

Sub clause 6.2.3.1	Establishing a three-way conversation that would include calls which are not intended for speech communication is not prevented
Sub clauses 8.1.1, 8.1.2 and 8.1.3	No charging information for the use of the Three-Party supplementary service can be sent to the served user.
Sub clause 8.16	<p>A remote party in a three-way conversation can invoke the 3PTY supplementary service in order to make their connection to the three-way conversation a part of another three-way conversation controlled by that remote party</p> <p>A remote party in a three-way conversation can invoke the 3PTY supplementary service in order to make their connection to the three-way conversation a part of another three-way conversation controlled by that remote party</p>

## MCMC MTSFB TC T008:2014

### B3.13.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the 3PTY supplementary service are contained in the standard ETS 300 187 [41]. The stage 2 description can be taken as informative. The implementation of the 3PTY supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.13.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the 3PTY supplementary service is contained in the standard ETS 300 188-1 [42]. The 3PTY supplementary service is implemented in the Malaysian network without national definitions or exceptions.

### B3.14 Call Forwarding (CFB, CFU, CFNR)

#### B3.14.1 Definition

The Call Forwarding supplementary services comprise the following services:

- Call Forwarding Busy (CFB);
- Call Forwarding Unconditional (CFU);
- Call Forwarding No Reply (CFNR).

The CFB supplementary service enables a served user to have the network redirect to another user calls which are addressed to the served user's ISDN number and meet busy.

The CFU supplementary service enables a served user to have the network redirect to another user calls which are addressed to the served user's ISDN number.

The CFNR supplementary service enables a served user to have the network redirect to another user call which are addressed to the served user's ISDN number, and for which the connection is not established within a defined period of time.

#### B3.14.2 Service Description

##### CFB:

The service description (stage 1 description) for the CFB supplementary service is contained in the standard ETS 300 199 [45].

The following gives the recommended guidelines for the implementation of the CFB supplementary service in the Malaysian network.

Clause 5 and Sub clause 6.2.3	The maximum number for call diversions is 5 for each call.
Sub clause 7.1	Once a call has been forwarded to a non-ISDN network the indication call forwarded is used.  Once a call arrives at an ISDN network from a non-ISDN network with the indication forwarded call the call forwarding counter will be set to one, if no other value for the call forwarding counter is supplied.

## MCMC MTSFB TC T008:2014

Sub clause 8.17	Forwarding any UUI or request for UUS may be restricted to forwarding users who subscribe to the relevant parts of the UUS supplementary service.
-----------------	---

### CFU:

The service description (stage 1 description) for the CFU supplementary service is contained in the standard ETS 300 200 [46].

The following gives the recommended guidelines for the implementation of the CFU supplementary service in the Malaysian network.

Clause 5 and Sub clause 6.2.3	<p>The maximum number for call diversions is 5 for each call. Sub clause 7.1</p> <p>Once a call has been forwarded to a non-ISDN network the indication call forwarded is used.</p> <p>Once a call arrives at an ISDN network from a non-ISDN network with the indication forwarded call the call forwarding counter will be set to one, if no other value for the call forwarding counter is supplied.</p>
Sub clause 8.17	Forwarding any UUI or request for UUS may be restricted to forwarding users who subscribe to the relevant parts of the UUS supplementary service.

### CFNR:

The service description (stage 1 description) for the CFNR supplementary service is contained in the standard ETS 300 201 [47].

The following gives the recommended guidelines for the implementation of the CFNR supplementary service in the Malaysian network.

Clause 5 and Sub clause 6.2.3	The maximum number for call diversions is 5 for each call.
Sub clause 6.1	The value of 30 seconds will be used for the no reply timer
Sub clauses 6.2.3.1 and 6.3.3	The method b) is used. The call to the served user will be cleared when the CFNR supplementary service is invoked. If the forwarded call cannot be completed the call shall be terminated
Sub clause 7.1	<p>Once a call has been forwarded to a non-ISDN network the indication call forwarded is used.</p> <p>Once a call arrives at an ISDN network from a non-ISDN network with the indication forwarded call the call forwarding counter will be set to one, if no other value for the call forwarding counter is supplied.</p>

## MCMC MTSFB TC T008:2014

Sub clause 8.17	Forwarding any UUI or request for UUS may be restricted to forwarding users who subscribe to the relevant parts of the UUS supplementary service.  If the calling user requests service 1 and indicates that it is not required on the call, then if the called user has explicitly accepted the request, the request for the call forwarding no reply supplementary service will be rejected and the call shall not be forwarded.
Annex A	The following service provider option in the note is supported: the request for the call forwarding no reply supplementary service will be rejected and the call will not be forwarded

### B3.14.3 Functional Capabilities and Information Flows

#### CFB:

The functional capabilities and information flows (stage 2 description) for the CFB supplementary services are contained in the standard ETS 300 203 [48]. The stage 2 description can be taken as informative. The implementation of the CFB supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

#### CFU:

The functional capabilities and information flows (stage 2 description) for the CFU supplementary services are contained in the standard ETS 300 204 [49]. The stage 2 description can be taken as informative. The implementation of the CFU supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

#### CFNR:

The functional capabilities and information flows (stage 2 description) for the CFNR supplementary services are contained in the standard ETS 300 205 [50]. The stage 2 description can be taken as informative. The implementation of the CFNR supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.14.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the Call Forwarding supplementary services is contained in the standard ETS 300 207-1 [51].

The following gives the recommended guidelines for the implementation of the Call Forwarding supplementary services in the Malaysian network.

## MCMC MTSFB TC T008:2014

Clause 5	<p>The diversion supplementary services are provided on a per ISDN number basis.</p> <p>The call forwarding services can be subscribed collectively for all the basic services to which the user(s) subscribes</p>
Sub clause 6.1	<p>The subscription options listed in the table 1 are provided.</p> <p>In the table 2 the following network provider option values are applicable:</p> <ul style="list-style-type: none"> <li>-served user call is cleared on invocation of diversion;</li> <li>-maximum number of diversions for a single call is 5;</li> <li>-call forwarding on no reply timer value is 20 s;</li> <li>-partial rerouting is provided at the T reference point</li> </ul>
Sub clause 9.1.1.1	<p>The forwarding exchange shall verify the forwarded-to number only for a limited set of numbers; the minimum requirement is that emergency numbers are not accepted as forwarded to numbers</p>
Sub clauses 9.2.3.1 and 9.2.5.1	<p>The type of the number shall be set to "unknown" and the number is organized according to the network dialing plan.</p>
Sub clause 9.2.4.4.1 and clause 13	<p>The value of T-CFNR is 20 s</p>
Sub clause 9.2.4.4.1	<p>The network provider option "served user call retention on invocation of diversion" is "clear call on invocation"</p>
Sub clauses 10.4.1 and 10.5.1	<p>If a diverted call is presented from a private network to the public network, then the public network is required to check the redirecting number from the SETUP message. The number shall be checked against the numbering space of the private network. In case of a mismatch the redirecting number shall be replaced by the default number associated with the private network.</p> <p>It is recommended for the coding of the redirecting number information sent by the private network:</p> <ul style="list-style-type: none"> <li>- The "numbering plan identification" field shall be coded "ISDN/Telephony numbering plan". In case DDI is not activated for the same access:</li> <li>- The "type of number" field shall be coded "subscriber number" and the full ISDN subscriber number shall be sent.</li> </ul> <p>In case DDI is activated for the same access:</p> <ul style="list-style-type: none"> <li>- The "type of number" field shall be coded "unknown" and only the extension number of the redirecting number shall be sent. The network then completes the redirecting number by adding the national number of the access to the redirecting number information.</li> </ul>
Sub clause 10.5.1	<p>The public network shall clear the call towards the private network on acceptance of the call rerouting request</p>

## MCMC MTSFB TC T008:2014

### B3.15 User-to-User Signaling (UUS)

#### B3.15.1 Definition

The UUS supplementary service enables a user to send/receive a limited amount of information to/from another user over the signaling channel in association with a call to the other user. This information shall be passed transparently (i.e. without modification of contents) through the network. The network shall not interpret or act upon this information.

The user can transfer UUI in different phases of the call depending on the service(s) to which the user subscribes. These services are:

- a) Service 1 - User-to-user information exchanged during the set-up and clearing phases of a call/connection, by transporting the User-to-user information element within call/connection control messages
- b) Service 2 - User-to user information exchanged from the sender's point of view during call/connection establishment, between the ALERTING and CONNECT messages, within USER INFORMATION messages; and
- c) Service 3 - User-to-user information exchanged while a call/connection is in the Active state, within USER INFORMATION messages.

#### B3.15.2 Service Description

The service description (stage 1 description) for the UUS supplementary service is contained in the standard ETS 300 284 [52].

The following gives the recommended guidelines for the implementation of the UUS supplementary service in the Malaysian network.

Clause 5	Service provider option for service 2, UUI sent by the calling user prior to receiving the acceptance of the call by the called user may be delivered to the called user after the call has been established, is supported.  Note on limitation of UUI to only 32 octets during an interim period of time is not applicable for the Malaysian network.
Sub clause 6.1	Service provider option about provision of one or any combination of services is supported. Service provider option about withdrawal separately per service is supported.
Sub clause 6.2.1.3	Service provider option about activation of service 3 by the called user after the connection has been established is supported
Sub clause 6.3.3	In case of excessive UUI length the sending user shall be informed
Clause 7	Service provider option about explicit acceptance, if the remote user replies with UUI to explicit request sent to an ISDN only supporting implicit requests, is supported.
Sub clauses 8.10.1, 8.10.2 and 8.10.3	Forwarding any UUI or request for UUS may be restricted to forwarding users who subscribe to the relevant parts of the UUS supplementary service



## MCMC MTSFB TC T008:2014

Sub clause 8.10.3	If the calling user requests service 1 and indicates that it is not required on the call, then if the called user has explicitly accepted the request, the request for the call forwarding no reply supplementary service will be rejected and the call shall not be forwarded.
Annex A	The following service provider option in the note is supported: the request for the call forwarding no reply supplementary service will be rejected and the call will not be forwarded.

### B3.15.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the UUS supplementary service are contained in the standard ETR 285 [53]. The stage 2 description can be taken as informative. The implementation of the UUS supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

### B3.15.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the UUS supplementary service is contained in the standard ETS 300 286-1 [54].

The following gives the recommended guidelines for the implementation of the UUS supplementary service in the Malaysian network.

Sub clause 6.1	Any combination of the following possibilities can be provided separately or globally: -service 1 implicit, or service 1 implicit together with service 1 explicit; -service 2; -service 3.
Sub clauses 9.2.2.1 and 9.2.2.2	The calling network shall accept the first two USER INFORMATION messages from the calling user and the calling network shall deliver them to the called user after the calling and called network have entered the Active (N10) call state.
Sub clause 9.2.2.2	The calling network shall send a STATUS message with cause #43 to the calling user when discarding the USER INFORMATION message.  The called network shall send a STATUS message with cause #43 to the called user when discarding the USER INFORMATION message
Sub clause 9.3.1.2.1	During the Active (U10) call state, the calling user or the called user can activate service 3
Sub clause 9.3.2.2	The sending network shall send a STATUS message with cause #43 to the sending user when discarding the USER INFORMATION message.

## MCMC MTSFB TC T008:2014

### B3.16 Explicit Call Transfer (ECT)

#### B3.16.1 Definition

The ECT supplementary service enables a user (user A) to transform two of that user's calls (an active call and a held call), each of which can be an incoming call or an outgoing call, into a new call between user B and user C.

#### B3.16.2 Service Description

The service description (stage 1 description) for the ECT supplementary service is contained in the standard ETS 300 367 [55].

The following gives the recommended guidelines for the implementation of the ECT supplementary service in the Malaysian network.

Clause 5 and Sub clause 6.2.3	The service provider option, that the ECT supplementary service can be invoked after user C has been informed of the call (i.e. an outgoing call from A to user C, where the connection has not yet been established), is supported
Sub clause 8.1.3	When the call is transferred and the transferring user is charged for the transferred part of the call, then the charging information shall be sent to the transferring user when the transferred call is terminated provided that the served user has activated the AOC-E supplementary service for that call

#### B3.16.3 Functional Capabilities and Information Flows

The functional capabilities and information flows (stage 2 description) for the ECT supplementary service are contained in the standard ETS 300 368 [56]. The stage 2 description can be taken as informative. The implementation of the ECT supplementary service in the Malaysian network shall be based on the stage 1 and stage 3 descriptions.

## MCMC MTSFB TC T008:2014

### B3.16.4 Digital Subscriber Signaling System No. One (DSS1) Protocol

The DSS1 protocol (stage 3 description) for the ECT supplementary service is contained in the standard ETS 300 369-1 [57].

The following gives the recommended guidelines for the implementation of the ECT supplementary service in the Malaysian network.

Clause 5 and Sub clause 9.2.5	The network option to allow the invocation of the ECT service when one of the calls is an outgoing call in the Call delivered (alerting) state is supported.
Sub clause 9.2	The explicit linkage procedure is supported
Sub clause 10.3	The "mechanism to avoid looping of uncontrolled circuits" is supported by the public network. If the loop prevention procedure cannot decide whether the resulting connection would result in a loop, the call transfer is completed. The time supervision for the loop prevention procedure is 2 seconds

### B3.17 Supplementary Service Interactions

The public network shall support protocol interaction between the various supplementary services according to ETS 300 195-1 [43]. Network options of ETS 300 195-1 are left as implementation options, unless stated otherwise in the Sub clauses relating to the individual supplementary services. Should any conflict arise between ETS 300 195-1 and the specifications in Sub clause 3.2 to 3.16, then the text of the individual supplementary services shall be taken as definitive.

- TE1 - ISDN-capable terminal equipment e.g.: Digital phone and digital fax
- TE2 - Non-ISDN equipment e.g: Analogue phone and the RS-232 serial port on computer
- TA - Terminal adapter that interface the TE2 devices with ISDN network
- NT1 - Network terminator that reside between telco's network and customer equipment
- NT2 - An intelligent device that can perform switching function e.g: PABX and Local Area Network (LAN)

**Annex C**  
(Informative)

**Amendments**

<b>Amendments to SKMM FTS ISDN-BA Rev. 1.01:2007</b>		
<b>Page</b>	<b>Clause</b>	<b>Items Amended</b>
Cover	-	The document has adopted new numbering system and cover page. It has been renumbered as "MCMC MTSFB TC T008:2014".
i	-	Explanatory note on the development of Technical Codes has been included.
1	1.2	Reference for Section D has been replaced with EN 300 403-1 11/99.
1	2	New clause on normative references has been included.
3	4.1	Power supply requirements have been revised based on the Information Booklet 2012 Edition, Approval of Electrical Equipment, issued by the Energy Commission.
4	4.1 (Figure 2)	Alphanumeric keypad layout has been included.
4	4.2.1	New clause on network interface has been included.
4	4.2.2	Connector specification has been revised to be either RJ11 or RJ45.
-	-	Old clause 2.3 on characteristics of telephone has been removed.
5	4.3	New clause on interoperability requirement has been included.
20	Section D	Network layer requirements have been revised based on EN 300 403-1 11/99, Integrated Services Digital Network (ISDN): Digital Subscriber Signaling System No. One (DSS1) protocol: Signaling network layer for circuit-mode basic call control; Part 1: Protocol Specification [ITU-T Recommendation Q.931 (1993), modified].
32	Annex A	The normative references have been updated.
33	Annex B	Technical guidelines of ISDN supplementary service have been included.

## Acknowledgements

### Members of Fixed Terminal Working Group

Mr Abd. Hamid Mustafa (Chairman)	Telekom Malaysia Berhad
Mr Ahmad Faizan Pardi (Vice Chairman)	SIRIM QAS International Sdn Bhd
Mrs Nur Rashidah Abas Azmi (Secretary)	Telekom Malaysia Berhad
Mr Shahadan Man	AJV Holding Sdn. Bhd.
Mr Zulkhairi Zainal Abidin	Epson Malaysia
Mr Tan Keok Kuang	NEC Corporation of Malaysia Sdn. Bhd
Mr Khairul Akmal Zahri	Packet One Networks Sdn. Bhd.
Mr Syed Ahmad Anas	Packet One Networks Sdn. Bhd.
Mr Sam Choong	Panasonic Malaysia
Mr Pang Chieng Yong	Panasonic Malaysia
Mr Mohd Ackmal Abd. Samad	Panasonic System Networks
Mrs Hafizah Zainal Abiddin	SIRIM QAS International Sdn Bhd
Mrs Nurhafenah Abdul Jalil	SIRIM QAS International Sdn Bhd
Mr Zul Jaafar	SIRIM QAS International Sdn Bhd
Mr Amin Hapis Khairan	Telekom Malaysia Berhad
Mr Anuar Wahab	Telekom Malaysia Berhad
Mrs Badariah Zainal	Telekom Malaysia Berhad
Mr Md Azmi Karnain	Telekom Malaysia Berhad
Mr Mohd Syaukiazahar	Telekom Malaysia Berhad
Mr Muhd Hadzir Abu Hassan	Telekom Malaysia Berhad
Mrs Nor Maizatul Syima	Telekom Malaysia Berhad
Mrs Nur Faliza Yaakup	Telekom Malaysia Berhad
Mr Rahmat Fauzi Zainal	Telekom Malaysia Berhad
Mrs Raja Nor Suha	Telekom Malaysia Berhad
Mrs Rosliza Abu Bakar	Telekom Malaysia Berhad
Mrs Suriyati Rahim	Telekom Malaysia Berhad
Ms Wan Nur Hanani	Telekom Malaysia Berhad
Mr Othman Sidek	TIME dotCom Berhad